

SIEMENS

Catalog
Extract
LV 10

Edition
10/2022

SETRON • SIVACON • ALPHA

Low-Voltage Power Distribution and Electrical Installation Technology

Terminal Blocks

[siemens.com/lowvoltage](https://www.siemens.com/lowvoltage)

Innovative solutions for industrial controls and power distribution

Reliable components and systems are essential in ensuring smooth power distribution in buildings and industrial plants.

With SIRIUS, SENTRON, SIVACON and ALPHA, we offer an innovative portfolio for standard-compliant and demand-oriented applications.

Efficient engineering tools and innovative cloud-based solutions can be flexibly tailored to individual requirements.



We are there when you need us

Your personal contact can be found at
www.siemens.com/lowvoltage/contact

Catalog LV 10 · 10/2022

You will find the latest edition and all future editions in the Siemens Industry Online Support at
www.siemens.com/lowvoltage/catalogs

Refer to the Industry Mall for current prices
www.siemens.com/lowvoltage/mall



The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with EN ISO 9001 (for the Certified Registration Nos., see www.siemens.com/system-certificates/ep). The certificate is recognized by all IQNet countries.

Technical specifications

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	II/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs)	4/1
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

I

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

A




Always the right connection

Terminal blocks enable incoming and outgoing cables to be connected in switchboards and control systems in a convenient and space-saving manner. They can be used in transport systems and automation technology as well as in building installation technology.

We offer you the complete range of connection technology with screw terminals, spring-loaded terminals and In-Push-out (iPo) terminals, combination plug-in terminals, insulation displacement terminals and a wide variety of accessories. These can be combined with each other. This allows you to benefit from a high level of flexibility as well as simplified configuration.

Terminal Blocks

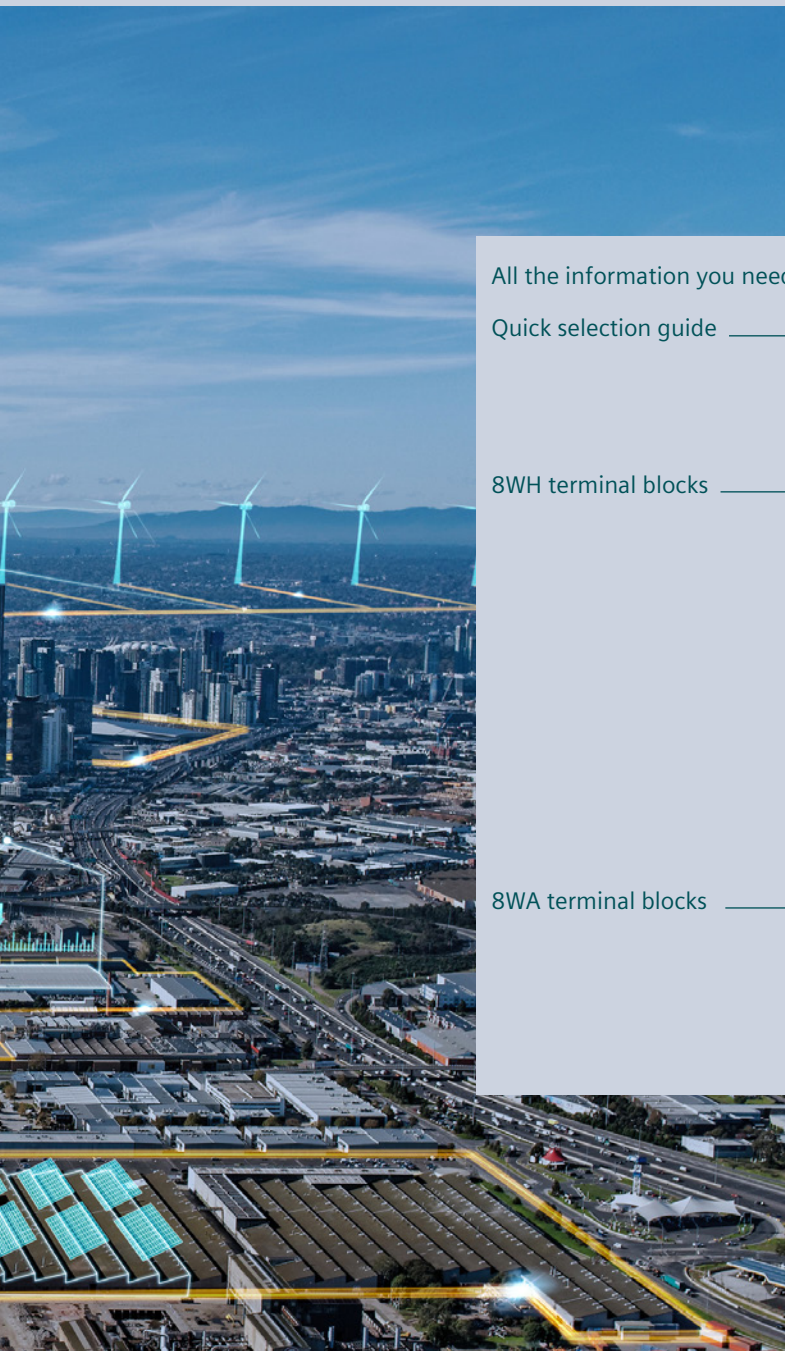

All the information you need	14/2
Quick selection guide	14/4
8WH terminal blocks	14/4
8WA terminal blocks	14/6
8WH terminal blocks	14/8
8WH6 iPo plug-in terminals	14/8
8WH6 iPo installation terminals	14/18
8WH2 spring-loaded terminals	14/24
8WH5 combination plug-in terminals	14/36
8WH3 insulation displacement terminals	14/40
8WH screw terminals	14/44
Accessories for 8WH terminal blocks	14/57
8WA terminal blocks	14/62
8WA1 screw terminals	14/62
8WA2 spring-loaded terminals	14/76
Accessories for 8WA terminal blocks	14/78

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about terminal blocks, please visit our website www.siemens.com/distribution-components

Your product in detail

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- Siemens ALPHA FIX terminal blocks – 8WH2 terminal with spring-loaded-connection bit.ly/2kKVz0D

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Terminal blocks sie.ag/2kW8ZXo

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or entering this web address incl. article number www.siemens.com/product?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at www.siemens.com/lowvoltage/components/contact

You will find further information on services at www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at www.siemens.com/support-request

... can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information

www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the [App Store](#) and [Play Store](#)

You will find further information at www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
www.siemens.com/lowvoltage/mall
- Image database
www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAX Download Manager at www.siemens.com/cax


Technical overview – Terminal blocks




The fast way to get you to our online services

This page provides you with comprehensive information and links on terminal blocks
www.siemens.com/lowvoltage/product-support (109769088)

8WH terminal blocks




8WH6
iPo plug-in terminals



8WH6
iPo installation
terminals

Through-type terminals



Through-type terminals

Two-tier terminals

Three-tier terminals

Four-tier motor terminals

2.5 ... 150 mm² [See page 14/8](#)

2.5 ... 4 mm² [See page 14/11](#)

–

–

2.5 ... 35 mm² [See page 14/18](#)

–

–

–

Isolating terminals



Isolating and isolating blade terminals

Two-tier isolating terminals

N conductor isolating terminals

Measuring transformer isolating terminals

2.5 ... 4 mm² [See page 14/12](#)

–


–

–

2.5 ... 35 mm² [See page 14/20](#)

–

Initiator/actuator terminals



Initiator terminals

Actuator terminals

Infeed terminals

1.5 mm² [See page 14/15](#)

1.5 mm² [See page 14/15](#)


2.5 mm² [See page 14/16](#)

–

–

–

Function terminals



Fuse terminals

Three-tier terminals

Three-tier isolating terminals

Diode terminals

Two-tier diode terminals

Shield terminals

4 mm² [See page 14/14](#)

–

–

–

–

–

–

2.5 mm² [See page 14/22](#)

2.5 mm² [See page 14/23](#)

–

–

–

Further information

[From page 14/8](#)

[From page 14/18](#)



8WH2
spring-loaded
terminals

1.5 ... 35 mm² [See page 14/24](#)

1.5 ... 4 mm² [See page 14/27](#)

2.5 mm² [See page 14/28](#)

2.5 ... 4 mm² [See page 14/29](#)

2.5 ... 4 mm² [See page 14/30](#)

–

–

–

–

–

–

–

4 mm² [See page 14/32](#)

–


–

2.5 mm² [See page 14/34](#)

2.5 mm² [See page 14/34](#)

–

From page 14/24



8WH5
combination
plug-in terminals

2.5 mm² [See page 14/36](#)

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

From page 14/36



8WH3
insulation displacement
terminals

1.5 ... 2.5 mm² [See page 14/40](#)

1.5 mm² [See page 14/40](#)

–

–

1.5 ... 2.5 mm² [See page 14/40](#)

–

–

–

–

–

–

–

–

–

–

–

–

–

–

–

From page 14/40



8WH1
screw terminals

2.5 ... 240 mm² [See page 14/44](#)

2.5 ... 4 mm² [See page 14/47](#)

–

–

4 ... 6 mm² [See page 14/48](#)

4 mm² [See page 14/50](#)

–

6 mm² [See page 14/51](#)

–

–

–

–

4 ... 6 mm² [See page 14/52](#)

–

–


4 mm² [See page 14/54](#)

2.5 mm² [See page 14/55](#)


Diameter
2 ... 35 mm [See page 14/56](#)

From page 14/44

8WA terminal blocks




8WA1
screw terminals



8WA2
spring-loaded
terminals

Through-type terminals



Through-type terminals

Two-tier terminals

Three-tier terminals

Four-tier motor terminals

2.5 ... 95 mm² [See page 14/62](#)

4 mm² [See page 14/67](#)

2.5 mm² [See page 14/68](#)

–

Isolating terminals



Isolating and isolating blade terminals

Two-tier isolating terminals

N conductor isolating terminals

Measuring transformer terminals

–

–

2.5 ... 16 mm² [See page 14/69](#)

6 mm² [See page 14/71](#)

–

Initiator/actuator terminals



Initiator terminals

Actuator terminals

Infeed terminals

–

–

–

1.5 mm² [See page 14/76](#)

1.5 mm² [See page 14/76](#)

1.5 mm² [See page 14/77](#)

Function terminals



Fuse terminals

Three-tier terminals

Three-tier isolating terminals

Diode terminals

Two-tier diode terminals

Shield terminals

1.5 mm² [See page 14/72](#)

–

–

2.5 mm² [See page 14/73](#)

4 mm² [See page 14/74](#)

–

–

Further information

[From page 14/62](#)


[From page 14/76](#)

8WH6 iPo plug-in terminals

Through-type terminals





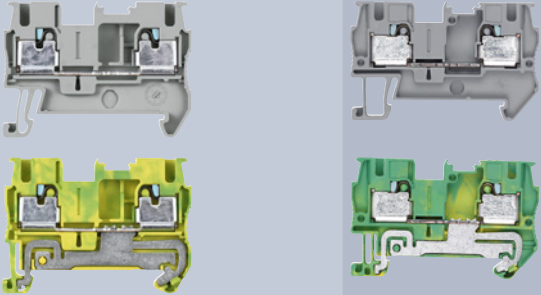

	Terminal size	Terminal size	
		2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm	
Max. load current I_{\max}	24 A	32 A	
Max. operational voltage U_{\max}	800 V	800 V	
AWG	26 ... 12	24 ... 10	
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 6 mm ²	
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.2 ... 4 mm ²	
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus		IEC 60947-7-1, IEC 60947-7-2, cULus







Terminals	Color		
① Through-type terminals			
2	● Gray	8WH6000-0AF00	8WH6000-0AG00
	● Blue	8WH6000-0AF01	8WH6000-0AG01
3	● Gray	8WH6003-0AF00	8WH6003-0AG00
	● Blue	8WH6003-0AF01	8WH6003-0AG01
4	● Gray	8WH6004-0AF00	8WH6004-0AG00
	● Blue	8WH6004-0AF01	8WH6004-0AG01
② PE through-type terminals			
2	● Green-yellow	8WH6000-0CF07	8WH6000-0CG07
3	● Green-yellow	8WH6003-0CF07	8WH6003-0CG07
4	● Green-yellow	8WH6004-0CF07	8WH6004-0CG07

Specific accessories

Covers					
	Terminals	Color	Width	Article No.	Article No.
	2	● Gray	2.2 mm	8WH9000-1GA00	8WH9003-1GA00
	3	● Gray	2.2 mm	8WH9000-2GA00	8WH9003-2SA00
	4	● Gray	2.2 mm	8WH9000-4GA00	8WH9003-4SA00
Compartment partitions					
	Terminals	Color	Width	Article No.	Article No.
	2	● Gray	2.0 mm	8WH9070-0AA00	8WH9070-0AA00
	3	● Gray	2.0 mm	8WH9070-0GA00	8WH9070-0GA00
	4	● Gray	2.0 mm	8WH9070-0HA00	8WH9070-0HA00
Cover segments					
	Color	Article No.	Article No.		
	● Gray	8WH9000-0GA00	-		
Warning covers new					
	Article No.	Article No.			
	8WH9060-5CA06	8WH9063-5CA06			

See general accessories, from page 14/57 onwards

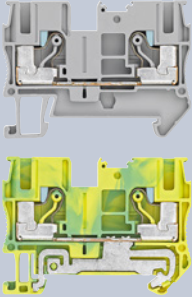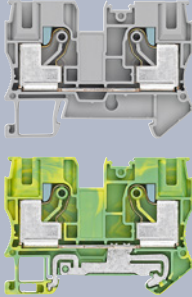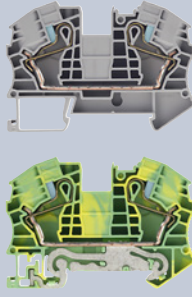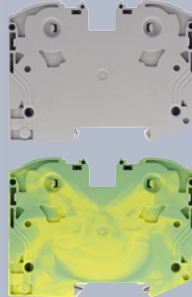6 mm ²	10 mm ²	16 mm ²	35 mm ²
8.2 mm	10.2 mm	12.2 mm	16 mm
41 A	57 A	90 A	125 A
1000 V	1000 V	1000 V	1000 V
20 ... 8	20 ... 6	20 ... 4	10 ... 2
0.5 ... 10 mm ²	0.5 ... 16 mm ²	0.5 ... 25 mm ²	6 ... 35 mm ²
0.5 ... 6 mm ²	0.5 ... 10 mm ²	0.5 ... 16 mm ²	6 ... 35 mm ²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, UL, CE	IEC 60947-7-1, IEC 60947-7-2, UL, CE
			

8WH6000-0AH00	8WH6000-0AJ00	8WH6000-0AK00	8WH6000-0AM00
8WH6000-0AH01	8WH6000-0AJ01	8WH6000-0AK01	8WH6000-0AM01
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
8WH6000-0CH07	8WH6000-0CJ07	8WH6000-0CK07	8WH6000-0CM07
-	-	-	-
-	-	-	-

Article No.	Article No.	Article No.	Article No.
8WH9004-3SA00	8WH9005-1SA00	8WH9006-1SA00	-
-	-	-	-
-	-	-	-

Article No.	Article No.	Article No.	Article No.
-	-	-	-
-	-	-	-
-	-	-	-




Article No.	Article No.	Article No.	Article No.
-	-	-	-

Article No.	Article No.	Article No.	Article No.
8WH9063-5CA06	8WH9065-5CA06	8WH9066-5CA06	8WH9067-5CA06

8WH6 iPo plug-in terminals



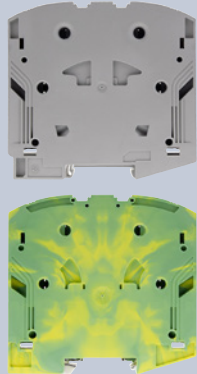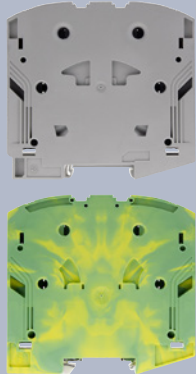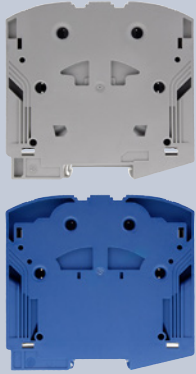


Through-type terminals for high-current applications



	Terminal size		
	50 mm ²	95 mm ²	150 mm ²
Terminal width	20 mm	25 mm	31 mm
Max. load current I_{max}	150 A	232 A	309 A
Operational voltage AC/DC	1000 V/1500 V	1000 V/1500 V	1000 V/1500 V
AWG	8 ... 2/0	4 ... 3/0	1/0 ... 300
Connection capacity, rigid	10 ... 70 mm ²	25 ... 95 mm ²	95 ... 150 mm ²
Connection capacity, flexible with end sleeve	10 ... 50 mm ²	25 ... 95 mm ²	95 ... 150 mm ²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus
			

Terminals	Color			
① Through-type terminals				
2	● Gray	8WH6000-0AN00	8WH6000-0AQ00	8WH6000-0AS00
	● Blue	8WH6000-0AN01	8WH6000-0AQ01	8WH6000-0AS01
② PE through-type terminals				
2	● Green-yellow	8WH6000-0CN07	8WH6000-0CQ07	–







Specific accessories





Connecting combs				
	Number of poles	Article No.	Article No.	Article No.
	2-pole	8WH9020-3AB00	8WH9020-3AD00	8WH9020-3AF00
	3-pole	8WH9020-3AC00	8WH9020-3AE00	8WH9020-3AG00
Tap-off terminal				
	Number of poles	Article No.	Article No.	Article No.
	1-pole	8WH9120-0DA00	8WH9120-0DA00	8WH9120-0DA00
Test plugs				
	Surface	Article No.	Article No.	Article No.
	Metal	8WH9010-0NB00	8WH9010-0NB00	8WH9010-0NB00
Insulating sleeves for test plugs				
	Color	Article No.	Article No.	Article No.
	● Red	8WH9010-0MB02	8WH9010-0MB02	8WH9010-0MB02
Warning covers new				
		Article No.	Article No.	Article No.
		8WH9067-5CA06	8WH9068-5CA06	8WH9068-5CA06

See general accessories, from page 14/57 onwards

Two-tier terminals








	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 6 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.2 ... 4 mm ²
Standard	IEC 60947-7-1, IEC 60947-7-2,  US	IEC 60947-7-1, IEC 60947-7-2,  US
		
		

Version	Color		
① Two-tier terminals			
Without equipotential bonding	 Gray	8WH6020-0AF00	8WH6020-0AG00
	 Blue	8WH6020-0AF01	8WH6020-0AG01
With equipotential bonding	 Gray	8WH6025-0AF00	8WH6025-0AG00
② PE two-tier terminals¹⁾			
	 Green-yellow	8WH6020-0CF07	8WH6020-0CG07

¹⁾ Bridging the terminal is only possible in the top tier (in the center).

Specific accessories

Covers					
	Terminals	Color	Width	Article No.	Article No.
	4	 Gray	2.2 mm	8WH9000-4SE00	–
	4	 Gray	2.2 mm	–	8WH9003-1VA00
Compartment partitions					
	Terminals	Color	Width	Article No.	Article No.
	4	 Gray	2 mm	8WH9070-0BA00	8WH9070-0BA00

See general accessories, from page 14/57 onwards

8WH6 iPo plug-in terminals

Isolating terminals



	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 6 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.2 ... 4 mm ²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color			
2	Gray	8WH6000-6CF00	8WH6000-6AG00	
3	Gray	8WH6003-6CF00	–	
4	Gray	8WH6004-6CF00	–	

Specific accessories

Covers						
	Terminals	Color	Width	Article No.	Article No.	
	2	Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00	
	3	Gray	2.2 mm	8WH9000-3SD00	–	
	4	Gray	2.2 mm	8WH9000-5GA00	–	
Compartment partitions						
	Terminals	Color	Width	Article No.	Article No.	
	2	Gray	2.2 mm	8WH9070-0AA00	8WH9070-0AA00	
	3	Gray	2.2 mm	8WH9070-0GA00	–	
Plug-in zone connectors						
	Types	Color	I_{max}	Illuminated display	Article No.	Article No.
	Isolating plugs	Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
	Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
	Fused connectors ¹⁾	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
				Without	8WH9040-3DB08	8WH9040-3DB08
	Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

¹⁾ The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.



See general accessories, from page 14/57 onwards

Isolating blade terminals





	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	400 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 6 mm ²
Connection capacity, two rigid conductors	–	0.5 ... 6 mm ²
Connection capacity, one flexible conductor	0.14 ... 2.5 mm ²	0.2 ... 4 mm ²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color	2.5 mm ²	4 mm ²
2	● Gray	8WH6000-6AF00	8WH6000-6CG00
3	● Gray	8WH6003-6AF00	–
4	● Gray	8WH6004-6AF00	–



Specific accessories


Covers					
	Terminals	Color	Width	Article No.	Article No.
	2	● Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00
	3	● Gray	2.2 mm	8WH9000-3SD00	–
	4	● Gray	2.2 mm	8WH9000-5GA00	–

Compartment partitions					
	Terminals	Color	Width	Article No.	Article No.
	2	● Gray	2 mm	8WH9070-0AA00	8WH9070-0AA00

See general accessories, from page 14/57 onwards

8WH6 iPo plug-in terminals

Fuse terminals



Terminal size

4 mm²

Terminal width 6.2 mm

Max. load current I_{\max} 6.3 A

Max. operational voltage U_{\max} 500 V

AWG 24 ... 10

Connection capacity, one rigid conductor 0.2 ... 6 mm²




Connection capacity, one flexible conductor with end sleeve 0.2 ... 4 mm²

Standard cULus, CE




LED	Color		
Fuse terminals for 5 × 20 mm G fuse links			
① Without	● Black		8WH6000-1GG08
② 10 ... 30 V AC/DC	● Black		8WH6000-1KG38
② 110 ... 250 V AC/DC	● Black		8WH6000-1MG88

Specific accessories

Covers				
	Terminals	Color	Width	Article No.
	2	● Gray	2.2 mm	8WH9003-1GA00
5 × 25 mm G fuse links				
	Types	Breaking capacity	Rated uninterrupted current	Article No.
	Quick	Large	1 A	8WA1822-7EF16
			1.6 A	8WA1822-7EF18
			2.5 A	8WA1822-7EF21
			4 A	8WA1822-7EF23
			6.3 A	8WA1822-7EF25
	Slow	Small	1 A	8WA1822-7EF76
			1.6 A	8WA1822-7EF78
			2.5 A	8WA1822-7EF81
			4 A	8WA1822-7EF83
			6.3 A	8WA1822-7EF85
Isolating links, 5 × 20 mm				
	Size		Article No.	
	5 × 20 mm			8WH9021-0CB12

See general accessories, from page 14/57 onwards

Initiator/actuator terminals

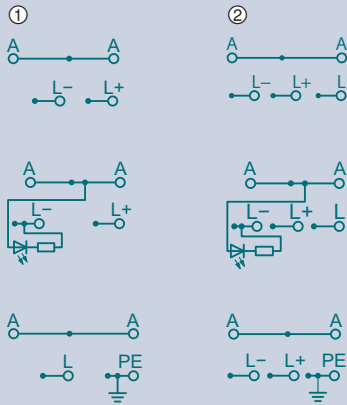

	Terminal size 1.5 mm ²	
Terminal width	3.5 mm	3.5 mm
Max. load current I_{\max}	13.5 A	13.5 A
Max. operational voltage U_{\max}	250 V	250 V
AWG	26 ... 14	26 ... 14
Connection capacity, flexible with end sleeve, with plastic sleeve	0.14 ... 1.0 mm ²	0.14 ... 1.0 mm ²
Connection capacity, flexible with end sleeve, without plastic sleeve	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Standard	IEC 60947-7-1	IEC 60947-7-1

Conductors ¹⁾	Number of connections	LED	Color		
1 Initiator terminal					
3-wire, L+, L-, A	4	–	● Gray	8WH6003-0DE00	–
3-wire, L+, L-, A	4	Green, 24 V (15 ... 30 V DC)	● Gray	8WH6003-0FE00	–
3-wire, L, A, PE	4	–	● Gray	8WH6003-0HE00	–
2 Actuator terminal					
4-wire, L+, L-, L, A	5	–	● Gray	–	8WH6004-0DE00
4-wire, L+, L-, L, A	5	Green, 24 V (15 ... 30 V DC)	● Gray	–	8WH6004-0FE00
4-wire, L+, L-, PE, A	5	–	● Gray	–	8WH6004-0HE00


¹⁾ L+ = red, L- = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

Specific accessories

Covers					
	Version	Width	Color	Article No.	Article No.
	For 3-wire	2.2 mm	● Gray	8WH9001-2VD00	–
	For 4-wire	2.2 mm	● Gray	–	8WH9001-4VE00

8WH6 iPo plug-in terminals

Infeed terminals for initiator/actuator terminals



Connection capacity, flexible with end sleeve, with plastic sleeve
 Connection capacity, flexible with end sleeve, without plastic sleeve
 Standard

Terminal size

2.5 mm²

Terminal width 7 mm

Max. load current I_{\max} 20 A


Max. operational voltage U_{\max} 250 V

AWG 24 ... 12

0.2 ... 2.5 mm²

0.2 ... 2.5 mm²

IEC 60947-7-1



Conductors ¹⁾	Color	
① 3-wire, L+, L-	● Orange	8WH6003-0DF04
② 4-wire, L+, L-, PE	● Orange	8WH6004-0HE04

¹⁾ L+ = red, L- = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

See general accessories, from page 14/57 onwards


Specific accessories for 8WH6 initiator/actuator terminals

Connecting combs





Number of poles	Load current	Color	Article No.
2-pole	17.5 A	● Red	8WH9020-6JC02
		● Blue	8WH9020-6JC01
		● Gray	8WH9020-6JC00
3-pole	17.5 A	● Red	8WH9020-6JD02
		● Blue	8WH9020-6JD01
		● Gray	8WH9020-6JD00
4-pole	17.5 A	● Red	8WH9020-6JE02
		● Blue	8WH9020-6JE01
		● Gray	8WH9020-6JE00
5-pole	17.5 A	● Red	8WH9020-6JF02
		● Blue	8WH9020-6JF01
		● Gray	8WH9020-6JF00
10-pole	17.5 A	● Red	8WH9020-6JL02
		● Blue	8WH9020-6JL01
		● Gray	8WH9020-6JL00
20-pole	17.5 A	● Red	8WH9020-6JS02
		● Blue	8WH9020-6JS01
		● Gray	8WH9020-6JS00

Labels, front, for terminal width 3.5 mm and terminal size 1.5 mm²



Types	Color	Article No.
Blank	● White	8WH8110-0AA05
Custom inscription	● White	8WH8140-0XA05-Z Y01
	● White	8WH8120-0XA05-Z Y01

Labels, flat, for terminal width 3.5 mm and terminal size 1.5 mm²



Types	Inscription	Color	Article No.
Blank		● White	8WH8111-0AA05
Consecutive numbering	Printed vertically	● White	8WH8141-0AB05
		● White	8WH8141-0AB15
		● White	8WH8141-0AB25
		● White	8WH8141-0AB35
		● White	8WH8141-0AB45
	Printed horizontally	● White	8WH8121-0AB05
		● White	8WH8121-0AB15
		● White	8WH8121-0AB25
		● White	8WH8121-0AB35
		● White	8WH8121-0AB45
Custom inscription	Printed vertically	● White	8WH8141-0XA05-Z Y01
	Printed horizontally	● White	8WH8121-0XA05-Z Y01

Labels for 8WH initiator/actuator terminals for labeling system




Types	Terminal width	Standard	Color	Article No.
Front, blank	3.5 mm	WIN 486	● White	8WH8112-0AA05
Flat, blank	3.5 mm	WIN 416	● White	8WH8113-0AA05

8WH6 iPo installation terminals

Through-type terminals



	Terminal size			
	2.5 mm ²		4 mm ²	
Terminal width	5.2 mm	5.2 mm	6.2 mm	6.2 mm
Terminal length	59.5 mm	59.5 mm	66 mm	66 mm
Terminal height	42.5 mm	43 mm	44 mm	46.3 mm
Max. load current I_{max}	24 A	–	32 A	–
Max. operational voltage U_{max}	800 V	–	800 V	–
Rated impulse voltage	–	–	–	–
AWG	26 ... 12	24 ... 12	24 ... 10	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 4 mm ²	0.2 ... 6 mm ²	0.2 ... 6 mm ²
Connection capacity, two rigid conductors	–	–	–	–
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm ²	0.25 ... 2.5 mm ²	0.25 ... 4 mm ²	0.25 ... 4 mm ²
Connection capacity, flexible without end sleeve	0.14 ... 2.5 mm ²	0.25 ... 2.5 mm ²	0.25 ... 4 mm ²	0.25 ... 4 mm ²
Tightening torque	–	–	–	–
Standard	IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1	IEC 60947-7-2

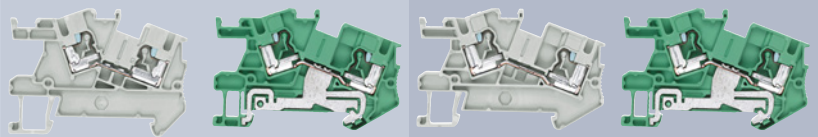







Terminals	Color	iPo plug-in technology	iPo plug-in technology
① Through-type terminals			
2	● Gray	8WH6001-0AF00	8WH6001-0AG00
	● Blue	8WH6001-0AF01	8WH6001-0AG01
② PE through-type terminals			
2	● Green-yellow	8WH6001-0CF07	8WH6001-0CG07

Specific accessories

Covers				
	Color	Width	Article No.	Article No.
	● Gray	1.8 mm	–	–
		2.2 mm	8WH9000-1WA00	8WH9003-7WA00
N conductor support brackets				
	• For holding the N busbar			
	Color		Article No.	Article No.
	● Blue		8WH9143-0AF01	8WH9143-0AF01
Connecting combs				
	Number of poles		Article No.	Article No.
	2-pole		–	–
	3-pole		–	–
	10-pole		–	–
Compartment partitions				
	Color		Article No.	Article No.
	● Gray		–	–
Connecting terminals				
	Color	Width	Article No.	Article No.
	● Blau	10.3 mm	8WH9126-0BA01	8WH9126-0BA01
N busbars, 10 × 3 mm new				
	Version	Length	Article No.	Article No.
	Kupfer verzinkt	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

6 mm ²		16 mm ²		35 mm ²	
8.2 mm	8.2 mm	12.2 mm	12.2 mm	15.2 mm	15 mm
66 mm	66 mm	51 mm	51 mm	55 mm	55 mm
50 mm	50 mm	50 mm	50 mm	51 mm	51 mm
41 A	–	76 A	–	125 A	125 A
800 V	–	400 V	–	800 V	–
–	–	6 kV	6 kV	8 kV	8 kV
20 ... 8	20 ... 8	22 ... 4	22 ... 4	18 ... 2	18 ... 2
0.5 ... 10 mm ²	0.5 ... 10 mm ²	6 ... 25 mm ²	6 ... 25 mm ²	0.75 ... 35 mm ²	0.75 ... 35 mm ²
–	–	2.5 ... 10 mm ²	2.5 ... 10 mm ²	0.75 ... 10 mm ²	0.75 ... 10 mm ²
0.5 ... 6 mm ²	0.5 ... 6 mm ²	6 ... 16 mm ²	6 ... 16 mm ²	0.75 ... 35 mm ²	0.75 ... 35 mm ²
0.5 ... 6 mm ²	0.5 ... 6 mm ²	6 ... 16 mm ²	6 ... 16 mm ²	0.75 ... 10 mm ²	0.75 ... 10 mm ²
–	–	2.5 ... 3.0 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	cULus, CE	cULus, CE
					
iPo plug-in technology		Screw terminals		Screw terminals	
8WH6001-0AH00	–	8WH1201-0AK00	–	8WH1201-0AM00	–
8WH6001-0AH01	–	8WH1201-0AK01	–	8WH1201-0AM01	–
–	8WH6001-0CH07	–	8WH1201-0CK07	–	8WH1201-0CM07


Article No.	Article No.	Article No.
–	8WH9005-3PA00	–
8WH9004-1WA00	–	–
Article No.	Article No.	Article No.
8WH9143-0AH01	–	–
Article No.	Article No.	Article No.
–	–	8WH9030-6BC00
–	–	8WH9030-6BD00
–	8WH9030-6AL00	–
Article No.	Article No.	Article No.
–	8WH9070-6HA00	–
Article No.	Article No.	Article No.
8WH9126-0BA01	8WH9126-0BA01	–
Article No.	Article No.	Article No.
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

8WH6 iPo installation terminals

N conductor isolating terminals





	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Terminal length	59 mm	66 mm
Terminal height	46.3 mm	46.3 mm
Max. load current I_{max} /cross-section	24 A/2.5 mm ²	32 A/4 mm ²
Max. operational voltage U_{max}	250 V	250 V
Rated impulse voltage	4 kV	6 kV
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.2 ... 6 mm ²
Connection capacity, two rigid conductors	0.2 ... 1.5 mm ²	0.2 ... 2 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.25 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	max. 0.5 mm ²	max. 1 mm ²
Tightening torque	–	–
Standard	IEC 60947-7-1	IEC 60947-7-1



Terminals	Color	iPo plug-in technology	iPo plug-in technology
2	● Blue	8WH6001-0BF01	8WH6001-0BG01

Specific accessories

Covers


	Color	Width	Article No.	Article No.
	● Blue	2.2 mm	8WH9000-1SA00	8WH9003-1SA00
	● Gray	2.2 mm	–	–

N conductor support brackets


- For holding the N busbar 10 × 3 mm
- To be placed every 20 cm

	Color	Article No.	Article No.
	● Blue	8WH9143-0AF01	8WH9143-0AF01
	–	–	–





Connecting terminals

	Color	Width	Article No.	Article No.
	● Blue	10.3 mm	8WH9126-0BA01	8WH9126-0BA01

N busbars, 10 × 3 mm **new**

	Version	Length	Article No.	Article No.
	Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

6 mm ²	10 mm ²	16 mm ²	35 mm ²
8.2 mm	10.2 mm	12.2 mm	15 mm
66.3 mm	55 mm	55 mm	55 mm
50 mm	47 mm	50 mm	50 mm
41 A/6 mm ²	57 A/16 mm ²	76 A/25 mm ²	110 A/35 mm ²
400 V	400 V	400 V	400 V
6 kV	6 kV	6 kV	6 kV
20 ... 8	–	–	–
0.5 ... 10 mm ²	0.5 ... 16 mm ²	6 ... 25 mm ²	0.75 ... 35 mm ²
0.5 ... 4 mm ²	0.5 ... 4 mm ²	2.5 ... 10 mm ²	0.75 ... 10 mm ²
0.5 ... 6 mm ²	0.5 ... 10 mm ²	6 ... 16 mm ²	0.75 ... 35 mm ²
0.5 ... 1.5 mm ²	0.5 ... 2.5 mm ²	4 ... 6 mm ²	0.75 ... 10 mm ²
–	1.5 ... 1.8 Nm	1.5 ... 1.8 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
			
iPo plug-in technology	Screw terminals	Screw terminals	Screw terminals
8WH6001-0BH01	8WH1201-0BJ01	8WH1201-0BK01	8WH1201-0BM01


Article No.	Article No.	Article No.	Article No.
8WH9004-1SA00	–	–	–
–	8WH9005-3PB00	8WH9005-3PB00	–
Article No.	Article No.	Article No.	Article No.
8WH9143-0AH01	–	–	–
–	8WH9141-0BC01	8WH9141-0BC01	8WH9141-0BC01
Article No.	Article No.	Article No.	Article No.
8WH9126-0BA01	8WH9126-0BA01	8WH9126-0BA01	–
Article No.	Article No.	Article No.	Article No.
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

8WH6 iPo installation terminals

Three-tier terminals






	Terminal size
	2.5 mm ²
Terminal width	5.2 mm
Terminal length	101 mm
Terminal height	50.5 mm
Max. load current I_{\max} /cross-section	24 A/4 mm ²
Max. operational voltage U_{\max} (L-L)	400 V
Rated voltage U_n (L-N, L-PE)	250 V
AWG	26 ... 12
Connection capacity, rigid	0.14 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm ²



Types	Color	
L	● Gray	8WH6001-4QF00
L/L	● Gray	8WH6001-4DF00
L/N	● Gray	8WH6001-4CF00
PE/L/L	● Gray	8WH6001-4HF00
PE/L/N	● Gray	8WH6001-4EF00
PE/L/NT	● Gray	8WH6001-4FF00


Specific accessories

Covers			
	Color	Width	Article No.
	● Gray	2.2 mm	8WH9000-3SA00
N conductor support brackets			
	<ul style="list-style-type: none"> For holding the N busbar To be placed every 20 cm 		
	Color	Width	Article No.
	● Blue	2 mm	8WH9142-0AF01
Connecting terminals			
	Color	Width	Article No.
	● Blue	10.3 mm	8WH9126-0BA01
N busbars, 10 × 3 mm new			
	Version	Length	Article No.
	Copper, tinned ¹⁾	1000 mm	8WH9030-2AB12


¹⁾ Only copper busbars may be installed.

See general accessories, from page 14/57 onwards

Three-tier isolating terminals




	Terminal size		
	2.5 mm ²		
Terminal width	5.2 mm	5.2 mm	5.2 mm
Terminal length	101 mm	101 mm	101 mm
Terminal height	50.5 mm	50.5 mm	50.5 mm
Max. load current I_{max} /cross-section	24 A/4 mm ²	24 A/4 mm ²	24 A/4 mm ²
Max. operational voltage U_{max} (L-L)	400 V	400 V	400 V
Rated voltage U_n (L-N, L-PE)	250 V	250 V	250 V
AWG	26 ... 12	26 ... 12	26 ... 12
Connection capacity, rigid	0.25 ... 4 mm ²	0.25 ... 4 mm ²	0.25 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.25 ... 2.5 mm ²	0.25 ... 2.5 mm ²	0.25 ... 2.5 mm ²



Types	Color			
① Through-type terminals with identical contour				
PE/L/L	● Gray	–	–	8WH6001-4PF00
② Isolating terminals				
PE/L/L isolation	● Gray	8WH6001-4MF00	–	–
③ Isolating blade terminals				
PE/L/L isolating blade	● Gray	–	8WH6001-4NF00	–
PE/L/N isolating blade	● Gray	–	8WH6001-4GF00	–

Specific accessories


Covers for isolating terminal in the contour

	Color	Width	Article No.	Article No.	Article No.
	● Gray	2.2 mm	–	8WH9000-6SA00	8WH9000-6SA00

See general accessories, from page 14/57 onwards

8WH2 spring-loaded terminals

Through-type terminals



	Terminal size	
	1.5 mm ²	2.5 mm ²
Terminal width	4.2 mm	5.2 mm
Max. load current I_{max}	17.5 A	31 A
Max. operational voltage U_{max}	500 V	800 V
AWG	28 ... 16	28 ... 12
Connection capacity, rigid	0.08 ... 1.5 mm ²	0.08 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.14 ... 1.5 mm ²	0.14 ... 2.5 mm ²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, ®	IEC 60947-7-1, IEC 60947-7-2, cULus

Terminals	Color		
① Through-type terminals			
2	● Gray	8WH2000-0AE00	8WH2000-0AF00
	● Blue	8WH2000-0AE01	8WH2000-0AF01
	● Orange	8WH2000-0AE04	8WH2000-0AF04
	● Red	8WH2000-0AE02	8WH2000-0AF02
	● Black	8WH2000-0AE08	8WH2000-0AF08
	● Green	8WH2000-0AE03	8WH2000-0AF03
	● White	8WH2000-0AE05	8WH2000-0AF05
	● Yellow	8WH2000-0AE06	8WH2000-0AF06
3	● Gray	8WH2003-0AE00	8WH2003-0AF00
	● Blue	8WH2003-0AE01	8WH2003-0AF01
	● Orange	8WH2003-0AF04	8WH2003-0AF04
4	● Gray	8WH2004-0AE00	8WH2004-0AF00
	● Blue	8WH2004-0AE01	8WH2004-0AF01
	● Orange	8WH2004-0AF04	8WH2004-0AF04
② PE through-type terminals			
2	● Green-yellow	8WH2000-0CE07	8WH2000-0CF07
3	● Green-yellow	8WH2003-0CE07	8WH2003-0CF07
4	● Green-yellow	8WH2004-0CE07	8WH2004-0CF07

Specific accessories

Covers					
	Color	Width	Terminals	Article No.	Article No.
	● Gray	2.2 mm	2	8WH9000-1GA00	8WH9000-1GA00
			3	8WH9000-2GA00	8WH9000-2GA00
			4	8WH9000-4GA00	8WH9000-4GA00
Compartment partitions					
	Color		Terminals	Article No.	Article No.
	● Gray		2	8WH9070-0AA00	8WH9070-0AA00
			3	8WH9070-0GA00	8WH9070-0GA00
			4	8WH9070-0HA00	8WH9070-0HA00
Cover segments					
	<ul style="list-style-type: none"> For covering multi-wire terminals when mounting two-wire terminals side-by-side 				
	Color			Article No.	Article No.
	● Gray			8WH9000-0GA00	8WH9000-0GA00
Warning covers for the operating shafts of 8WH2 through-type terminals					
				Article No.	Article No.
				8WH9061-5AA06	8WH9060-5AA06

4 mm ²	6 mm ²	10 mm ²	16 mm ²	35 mm ²
6.2 mm	8.2 mm	10.2 mm	12.2 mm	16 mm
40 A	52 A	65 A	90 A	125 A
800 V	1000 V	1000 V	1000 V	1000 V
28 ... 10	24 ... 8	24 ... 6	24 ... 4	14 ... 2
0.08 ... 6 mm ²	0.2 ... 10 mm ²	1.5 ... 16 mm ²	0.2 ... 25 mm ²	2.5 ... 35 mm ²
0.14 ... 4 mm ²	0.25 ... 6 mm ²	1.5 ... 10 mm ²	0.25 ... 16 mm ²	2.5 ... 35 mm ²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
				

8WH2000-0AG00	8WH2000-0AH00	8WH2000-0AJ00	8WH2000-0AK00	8WH2000-0AM00
8WH2000-0AG01	8WH2000-0AH01	8WH2000-0AJ01	8WH2000-0AK01	8WH2000-0AM01
8WH2000-0AG04	–	–	–	–
8WH2000-0AG02	–	–	–	–
8WH2000-0AG08	–	–	–	–
8WH2000-0AG03	–	–	–	–
8WH2000-0AG05	–	–	–	–
8WH2000-0AG06	–	–	–	–
8WH2003-0AG00	8WH2003-0AH00	–	–	–
8WH2003-0AG01	8WH2003-0AH01	–	–	–
–	–	–	–	–
8WH2004-0AG00	–	–	–	–
8WH2004-0AG01	–	–	–	–
–	–	–	–	–
8WH2000-0CG07	8WH2000-0CH07	8WH2000-0CJ07	8WH2000-0CK07	8WH2000-0CM07
8WH2003-0CG07	8WH2003-0CH07	–	–	–
8WH2004-0CG07	–	–	–	–



Article No.	Article No.	Article No.	Article No.	Article No.
8WH9003-1GA00	8WH9004-1GA00	8WH9005-1GA00	8WH9006-1GA00	–
8WH9003-2GA00	8WH9004-2GA00	–	–	–
8WH9003-4GA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9070-0AA00	8WH9070-0DA00	–	–	–
8WH9070-0GA00	8WH9070-0DA00	–	–	–
8WH9070-0HA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9003-0GA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9063-5AA06	8WH9064-5AA06	8WH9065-5AA06	8WH9066-5AA06	8WH9067-5AA06



8WH2 spring-loaded terminals

Hybrid through-type terminals




	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{\max}	28 A	32 A
Max. operational voltage U_{\max}	800 V	800 V
AWG spring	28 ... 12	28 ... 10/26 ... 10
Connection capacity, rigid, spring-loaded	0.08 ... 4 mm ²	0.08 ... 6 mm ²
Connection capacity, flexible, spring-loaded	0.08 ... 2.5 mm ²	0.08 ... 4 mm ²
AWG screw	26 ... 14	28 ... 10/26 ... 10
Connection capacity, rigid, screw-type	0.14 ... 4 mm ²	0.14 ... 6 mm ²
Connection capacity, flexible, screw-type	0.14 ... 2.5 mm ²	0.14 ... 4 mm ²
Standard	IEC 60947-7-1, IEC 60947-7-2	IEC 60947-7-1, IEC 60947-7-2


Terminals	Color	Screw connection and spring-loaded connection	Screw connection and spring-loaded connection
① Hybrid through-type terminals			
3	● Gray	8WH2103-2BF00	8WH2103-2BG00
	● Blue	8WH2103-2BF01	8WH2103-2BG01
② PE hybrid through-type terminals			
3	● Green-yellow	8WH2103-3BF07	8WH2103-3BG07

Specific accessories

Covers					
	Color	Width	Terminals	Article No.	Article No.
	● Gray	2.2 mm	3	8WH9000-2HA00	8WH9003-2HA00

See general accessories, from page 14/57 onwards

Two-tier terminals



	Terminal size		
	1.5 mm ²	2.5 mm ²	4 mm ²
Terminal width	4.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	17.5 A	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V	500 V
AWG	28 ... 16	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 1.5 mm ²	0.08 ... 4 mm ²	0.08 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 1.5 mm ²	0.08 ... 2.5 mm ²	0.08 ... 4 mm ²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, CE	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus

Version	Number of poles	Terminals	Color			
① Two-tier terminals						
Without equipotential bonding	2-pole	4	● Gray	8WH2020-0AE00	8WH2020-0AF00	8WH2020-0AG00
			● Blue	8WH2020-0AE01	8WH2020-0AF01	8WH2020-0AG01
	6	● Gray	–	8WH2023-0AF00	–	–
		● Blue	–	8WH2023-0AF01	–	–
With equipotential bonding	1-pole	4	● Gray	8WH2025-0AE00	8WH2025-0AF00	8WH2025-0AG00
			● Blue	–	8WH2025-0AF01	–
	6	● Gray	–	8WH2022-0AF00	–	–
② Two-tier terminals, N at top and L at bottom						
Without equipotential bonding	2-pole	4	● Gray	–	8WH2020-4CF00	–
③ PE two-tier terminals¹⁾						
		4	● Green-yellow	8WH2020-0CE07	8WH2020-0CF07	8WH2020-0CG07
		6	● Green-yellow	–	8WH2023-0CF07	–

¹⁾ Only top tier can be fitted with connecting combs.

14


Specific accessories

Covers						
	Width	Terminals	Color	Article No.	Article No.	Article No.
	2.2 mm	4	● Gray	8WH9000-1VA00	8WH9000-1VA00	8WH9003-1VA00
		6	● Gray	–	8WH9000-2VA00	–
Compartment partitions						
			Color	Article No.	Article No.	Article No.
			● Gray	8WH9070-0BA00	8WH9070-0BA00	8WH9070-0BA00

See general accessories, from page 14/57 onwards

8WH2 spring-loaded terminals

Three-tier terminals

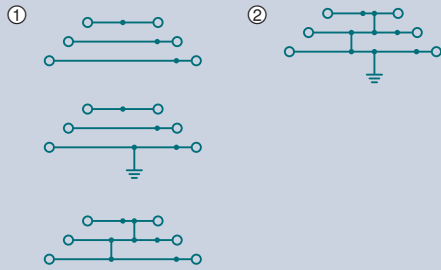

Terminal size

2.5 mm²


Terminal width 5.2 mm

Max. load current I_{\max} 28 A ¹⁾Max. operational voltage U_{\max} 500 V

AWG 28 ... 12

Connection capacity, rigid 0.08 ... 4 mm²Connection capacity, flexible with end sleeve 0.08 ... 2.5 mm²

Standard IEC 60947-7-1, IEC 60947-7-2, cULus



Version	Types	Color	
① Three-tier terminals			
Without equipotential bonding	–	● Gray	8WH2030-0AF00
		● Blue	8WH2030-0AF01
	PE/L/N	● Gray	8WH2030-4EF00
	PE/L/L	● Gray	8WH2030-4HF00
With equipotential bonding		● Gray	8WH2035-0AF00
		● Blue	8WH2035-0AF01
② PE three-tier terminals			
		● Green-yellow	8WH2035-0CF07


¹⁾ The total current through all connected conductors must not exceed the maximum load current.







Specific accessories

Covers			
	Width	Color	Article No.
	2.2 mm	● Gray	8WH9000-1GD00
Label holder			
		Color	Article No.
		● Gray	8WH9060-4BA00

See general accessories, from page 14/57 onwards

Four-tier motor terminals



	Terminal size		
	2.5 mm ²	4 mm ²	
Terminal width	5.2 mm	6.2 mm	
Max. load current I_{max}	26 A	32 A	
Max. operational voltage U_{max}	800 V	800 V	
AWG	28 ... 12	28 ... 10	
Connection capacity, rigid	0.08 ... 4 mm ²	0.08 ... 6 mm ²	
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²	0.08 ... 4 mm ²	
Standard	IEC 60947-7-1, IEC 60947-7-2,  us	IEC 60947-7-1, IEC 60947-7-2,  us,  ®	
			
Types	Color		
L/L/L/PE	 Gray	8WH2040-4LF00	8WH2040-4LG00


Specific accessories

Covers				
	Color	Width	Article No.	Article No.
	 Gray	2.2 mm	8WH9000-1GE00	–

See general accessories, from page 14/57 onwards

8WH2 spring-loaded terminals

Isolating terminals



	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A
Max. operational voltage U_{max}	400 V	400 V
AWG	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm ²	0.08 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²	0.08 ... 4 mm ²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color		
2	● Gray	8WH2000-6AF00	8WH2000-6AG00
3	● Gray	8WH2003-6AF00	–
4	● Gray	8WH2004-6AF00	–


Specific accessories

Covers						
	Width	Color	Terminals	Article No.	Article No.	
	2.2 mm	● Gray	2	8WH9000-2GA00	–	
			3	8WH9000-4GA00	–	
			4	8WH9000-5GA00	–	
Compartment partitions						
		Color	Terminals	Article No.	Article No.	
		● Gray	2	8WH9070-0AA00	8WH9070-0AA00	
			3	8WH9070-0GA00	–	
			4	8WH9070-0HA00	–	
Cover segments						
	<ul style="list-style-type: none"> For covering multi-wire terminals when mounting two-wire terminals side-by-side 					
		Color	Terminals	Article No.	Article No.	
		● Gray	3/4	8WH9000-0GA00	–	
Plug-in zone connectors						
	Types	Color	I_{max}	Illuminated display	Article No.	Article No.
	Isolating plugs	● Orange	20 A	–	8WH9040-0DB04	8WH9040-0DB04
	Through-type connectors	● Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
	Fused connectors ¹⁾	● Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
				Without	8WH9040-3DB08	8WH9040-3DB08
	Component connectors	● Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

¹⁾ The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

Isolating blade terminals



	Terminal size		
	2.5 mm ²	5.2 mm	4 mm ²
Terminal width	5.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A ¹⁾	16 A
Max. operational voltage U_{max}	400 V	400 V	400 V
AWG	28 ... 12	26 ... 14	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm ²	0.14 ... 4 mm ²	0.08 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.08 ... 4 mm ²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color			
2	● Gray	8WH2000-6CF00	–	8WH2000-6CG00
3	● Gray	–	8WH2003-6CF00	–
4	● Gray	–	8WH2004-6CF00	–

¹⁾ On terminals with three and four clamping points, the total current through all connected conductors must not exceed the max. load current.


Specific accessories




Covers						
	Color	Width	Terminals	Article No.	Article No.	Article No.
	● Gray	2.2 mm	2	8WH9000-2GA00	8WH9000-2GA00	–
			3	8WH9000-4GA00	8WH9000-4GA00	–
			4	8WH9000-5GA00	8WH9000-5GA00	–
Compartment partitions						
	Color		Terminals	Article No.	Article No.	Article No.
	● Gray		2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00
			3	8WH9070-0GA00	8WH9070-0GA00	–
			4	8WH9070-0HA00	8WH9070-0HA00	–
Cover segments						
	Color		Terminals	Article No.	Article No.	Article No.
	● Gray		3/4	8WH9000-0GA00	8WH9000-0GA00	–

See general accessories, from page 14/57 onwards

8WH2 spring-loaded terminals

Fuse terminals



	Terminal size 4 mm ²		
Terminal width	6.2 mm	8.2 mm	8.2 mm
Max. load current I_{\max}	6.3 A	10 A	30 A
Max. operational voltage U_{\max}	250 V	400 V	400 V
Max. individual power loss as overload protection	1.6 W	–	–
Max. power loss as a group as overload protection	1.6 W	–	–
Max. individual power loss as short-circuit protection	4 W	–	–
Max. power loss as a group as short-circuit protection	2.5 W	–	–
AWG	28 ... 10	28 ... 10	28 ... 10
Connection capacity, rigid	0.08 ... 6 mm ²	0.08 ... 6 mm ²	0.08 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 4 mm ²	0.08 ... 4 mm ²	0.08 ... 4 mm ²
Standard	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus
			

Illuminate display	Color			
For 5 × 20 mm G fuse links				
① Without	● Black	8WH2000-1GG08	–	–
② 15 ... 30 V	● Black	8WH2000-1JG38	–	–
② 30 ... 60 V	● Black	8WH2000-1JG68	–	–
② 110 ... 250 V	● Black	8WH2000-1MG08	–	–
For 6.3 × 32 mm G fuse links				
① Without	● Black	–	8WH2000-1HG08	–
② 100 ... 250 V	● Black	–	8WH2000-1RG08	–
For blade-type fuses according to ISO/DIS 8820 and DIN 72581-3 ¹⁾				
① Without	● Black	–	–	8WH2000-1AG08
② 12 V	● Black	–	–	8WH2000-1BG28
② 24 V	● Black	–	–	8WH2000-1BG38

¹⁾ Blade-type fuses must be ordered separately.

14

Specific accessories

Compartment partitions



Color	Terminals	Article No.	Article No.	Article No.
● Gray	2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00


See general accessories, from page 14/57 onwards

8WH2 spring-loaded terminals

Diode terminals



Terminal size	2.5 mm ²
Terminal width	5.2 mm
Max. load current I_{max}	Determined by the diode
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²
Diode	1N 4007, integrated
Standard	US




Terminals	Color	Let-through	
3	● Gray	① From left to right	8WH2003-5DF00
	● Gray	② From right to left	8WH2003-5CF00

Specific accessories


Covers				
	Color	Width	Terminals	Article No.
	● Gray	2.2 mm	3	8WH9000-4GA00
Compartment partitions				
	Color		Terminals	Article No.
	● Gray		3	8WH9070-0GA00
Cover segments				
				<ul style="list-style-type: none"> For covering multi-wire terminals when mounting two-wire terminals side-by-side
	Color		Terminals	Article No.
	● Gray		3	8WH9000-0GA00

See general accessories, from page 14/57 onwards

Two-tier diode terminals



Terminal size	2.5 mm ²
Terminal width	5.2 mm
Max. load current I_{max}	26 A
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²
Diode	1N 4007, integrated
Standard	US



Types	Color	
① With one diode		
Let-through from top to bottom	● Gray	8WH2020-5AF00
Let-through from bottom left to bottom right	● Gray	8WH2020-5DF00
② With two diodes		
Let-through from top to bottom left and from bottom right to bottom left	● Gray	8WH2020-5KF00
③ With illuminated display		
15 ... 30 V DC/2.5 ... 7.5 A	● Gray	8WH2020-5JF30

Specific accessories

Covers			
	Width	Color	Article No.
	2.2 mm	● Gray	8WH9000-1VA00
Compartment partitions			
		Color	Article No.
		● Gray	8WH9070-0BA00

See general accessories, from page 14/57 onwards

8WH5 combination plug-in terminals

Through-type terminals



Terminal size

2.5 mm²

Terminal width 5.2 mm

Max. load current I_{\max} 24 AMax. operational voltage U_{\max} 500 V

Standard IEC 61984, cULus




Terminals	Color	Combination plug-in connection
① Through-type terminals		
2	● Gray	8WH5000-0AF00
	● Blue	8WH5000-0AF01
② PE through-type terminals		
2	● Green-yellow	8WH5000-0CF07

Specific accessories

Covers				
	Terminals	Color	Width	Article No.
	2	● Gray	2.2 mm	8WH9000-1VA00
Compartment partitions				
	Terminals	Color		Article No.
	2	● Gray		8WH9070-0BA00


14

See general accessories, from page 14/57 onwards

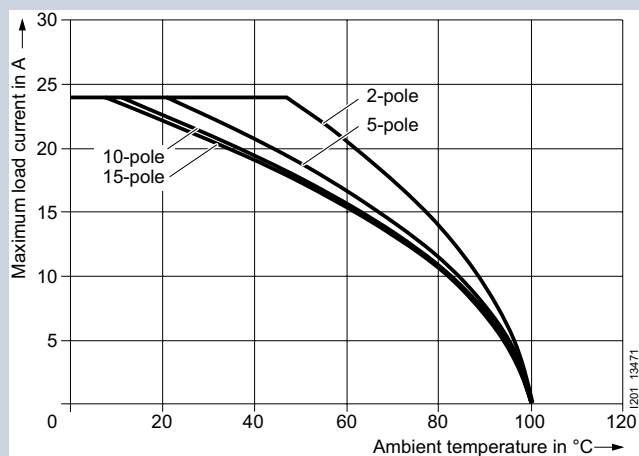

Derating curve for 8WH5000-0AF00

Hybrid through-type terminals



	Terminal size	2.5 mm ²
	Terminal width	5.2 mm
	Max. load current I_{max}/cross-section	24 A/2.5 mm ²
	Max. operational voltage U_{max}	500 V
	AWG	26 ... 12
	Connection capacity, rigid	0.14 ... 4 mm ²
	Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm ²
	Standard	UL 504

Terminals	Color	iPo plug-in connection and combination plug-in connection
① Hybrid through-type terminals		
2	● Gray	8WH5100-2PF00
② PE hybrid through-type terminals		
2	● Green-yellow	8WH5100-3PF07





Specific accessories










Covers				
	Terminals	Color	Width	Article No.
	2	● Gray	2.2 mm	8WH9000-1GA00
Compartment partitions				
	Terminals	Color		Article No.
	4	● Gray		8WH9070-0HA00

See general accessories, from page 14/57 onwards

8WH5 combination plug-in terminals






8WH9 plugs

	Terminal size 2.5 mm ²	
Terminal width	5.2 mm	5.2 mm
Max. load current I_{max}	24 A	24 A
Max. operational voltage U_{max}	500 V	500 V
AWG	28 ... 12	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm ²	0.08 ... 4 mm ²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm ²	0.08 ... 2.5 mm ²
Number of poles	1P	1P
Standard	 US	 US
		

Version	Color	With slot for comb	Without slot for comb
Plug			
Left element	 Gray	8WH9040-1DB00	8WH9040-1AB00
	 Blue	8WH9040-1DB01	8WH9040-1AB01
Central element	 Gray	8WH9040-1EB00	8WH9040-1BB00
	 Blue	8WH9040-1EB01	8WH9040-1BB01
Right element	 Gray	8WH9040-1FB00	8WH9040-1CB00
	 Blue	8WH9040-1FB01	8WH9040-1CB01
PE plugs			
Left element	 Green-yellow	8WH9040-1DB07	8WH9040-1AB07
Central element	 Green-yellow	8WH9040-1EB07	–
Right element	 Green-yellow	8WH9040-1FB07	8WH9040-1CB07


14

Specific accessories

Latches				
	Version	Color	Article No.	Article No.
	With strain relief	 Orange	8WH9050-2BA04	8WH9050-2BA04
	Without strain relief	 Orange	8WH9050-2AA04	8WH9050-2AA04
Shielding				
		• For connection of shielded cables		
	Cable diameter	Color	Article No.	Article No.
5 ... 10 mm	 Black		8WH9120-0DB08	8WH9120-0DB08

See general accessories, from page 14/57 onwards

Configuration of combination plug

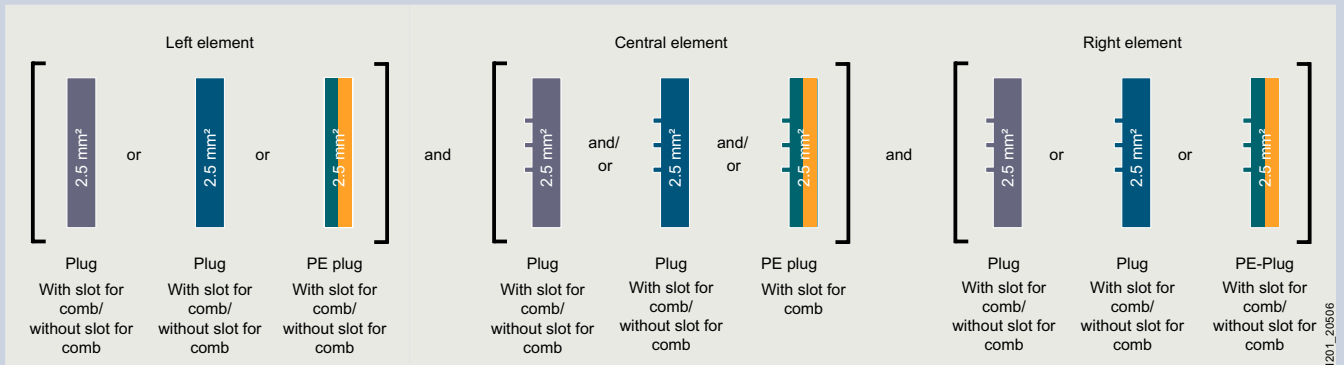


Note:


The configuration concept shown is just one example of how combination plugs can be configured.

8WH3 insulation displacement terminals

Through-type terminals



	Terminal size
	1.5 mm ²
Terminal width	5.2 mm
Max. load current I_{\max}	17.5 A ¹⁾
Max. operational voltage U_{\max}	800 V
AWG	24 ... 16
Connection capacity, rigid	0.25 ... 1.5 mm ²
Connection capacity, flexible with end sleeve	0.25 ... 1.5 mm ²



Terminals	Color	
① Through-type terminals		
2	● Gray	8WH3000-0AE00
	● Blue	8WH3000-0AE01
3	● Gray	8WH3003-0AE00
	● Blue	8WH3003-0AE01
4	● Gray	8WH3004-0AE00
	● Blue	8WH3004-0AE01
② PE through-type terminals		
2	● Green-yellow	8WH3000-0CE07
3	● Green-yellow	8WH3003-0CE07
4	● Green-yellow	8WH3004-0CE07

¹⁾ On terminals with three and four clamping points, the total current through all connected conductors must not exceed the maximum load current.

Specific accessories

Covers				
Terminals	Color	Width	Article No.	
	● Gray	2.2 mm	8WH9001-1AA00	
	● Gray	2.2 mm	8WH9001-2AA00	
	● Gray	2.2 mm	8WH9001-4AA00	
Compartment partitions				
Terminals	Color	Width	Article No.	
	● Gray	2 mm	8WH9070-0JA00	
	● Gray	2 mm	8WH9070-0MA00	
Cover segments				
	• For covering multi-wire terminals when mounting two-wire terminals side-by-side			Article No.
	3	● Gray	-	

See general accessories, from page 14/57 onwards

Two-tier terminals



Terminal size

1.5 mm²

Terminal width 5.2 mm

Max. load current I_{\max} 17.5 A


Max. operational voltage U_{\max} 500 V

AWG 24 ... 16

Connection capacity, rigid 0.25 ... 1.5 mm²

Connection capacity, flexible with end sleeve 0.25 ... 1.5 mm²

Standard US



Version	Color	
① Two-tier terminals		
Without equipotential bonding	Gray	8WH3020-0AE00
	Blue	8WH3020-0AE01
② PE two-tier terminals		
	Green-yellow	8WH3020-0CE07

Specific accessories

Covers			
	Width	Color	Article No.
	2.2 mm	Gray	8WH9001-1BA00
Compartment partitions			
		Color	Article No.
		Gray	8WH9070-0MA00


See general accessories, from page 14/57 onwards

8WH3 insulation displacement terminals

Isolating terminals








Terminal size	
Terminal width	5.2 mm
Max. load current I_{max}	16 A
Max. operational voltage U_{max}	400 V
AWG	24 ... 16
Connection capacity, rigid	0.25 ... 1.5 mm ²
Connection capacity, flexible with end sleeve	0.25 ... 1.5 mm ²
Standard	CSUs



Terminals	Color	Article No.
2	● Gray	8WH3000-6AE00

Specific accessories

Covers					
	Width	Color	Article No.		
	2.2 mm	● Gray	8WH9001-2AA00		
Plug-in zone connectors					
	Types	Color	I_{max}	Illuminated display	Article No.
	Isolating plugs	● Orange	–	–	8WH9040-0DB04
	Through-type connectors	● Gray	16 A	–	8WH9020-8AB00
	Fused connectors ¹⁾	● Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08
				Without	8WH9040-3DB08
	Component connectors	● Gray	6 A	–	8WH9040-0BB00

¹⁾ The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

8WH screw terminals

8WH1 through-type terminals








	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	32 A	41 A
Max. operational voltage U_{max}	1000 V	1000 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.14 ... 6 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.14 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, ©	IEC 60947-7-1, IEC 60947-7-2, cULus, ©

Terminals	Color		
① Through-type terminals			
2	<ul style="list-style-type: none"> ● Gray ● Blue ● Orange ● Red ● Black ● Green ● Yellow 	8WH1000-0AF00 8WH1000-0AF01 8WH1000-0AF04 8WH1000-0AF02 8WH1000-0AF08 8WH1000-0AF03 8WH1000-0AF06	8WH1000-0AG00 8WH1000-0AG01 8WH1000-0AG04 8WH1000-0AG02 8WH1000-0AG08 – –
② PE through-type terminals			
2	<ul style="list-style-type: none"> ● Green-yellow 	8WH1000-0CF07	8WH1000-0CG07

Specific accessories

Covers				
	Width	Color	Article No.	Article No.
	2.2 mm	<ul style="list-style-type: none"> ● Gray 	8WH9000-1PA00	8WH9000-1PA00
Compartment partitions				
	Width	Color	Article No.	Article No.
	2 mm	<ul style="list-style-type: none"> ● Gray 	8WH9070-6BA00	8WH9070-6BA00
Reducing combs				
	Version	Color	Article No.	Article No.
	From screw to screw	<ul style="list-style-type: none"> ● Turquoise 	–	–
	From screw to spring	<ul style="list-style-type: none"> ● Turquoise 	–	–
Warning covers for 8WH1				
	Image	Color	Article No.	Article No.
	Lightning symbol	<ul style="list-style-type: none"> ● Yellow 	8WH9060-5BA06	8WH9063-5BA06

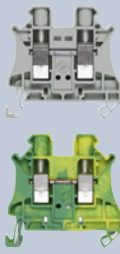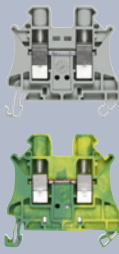See general accessories, from page 14/57 onwards

6 mm ²	10 mm ²	16 mm ²	35 mm ²	
8.2 mm	10.2 mm	12.2 mm	16 mm	16 mm
57 A	76 A	101 A	150 A	–
1000 V	1000 V	1000 V	1000 V	–
24 ... 8	20 ... 6	16 ... 4	16 ... 1/0	16 ... 2
0.2 ... 10 mm ²	0.5 ... 16 mm ²	1.5 ... 25 mm ²	1.5 ... 50 mm ²	1.5 ... 35 mm ²
0.2 ... 2.5 mm ²	0.5 ... 4 mm ²	1 ... 6 mm ²	1.5 ... 16 mm ²	1.5 ... 16 mm ²
0.25 ... 6 mm ²	0.5 ... 10 mm ²	1 ... 16 mm ²	1.5 ... 35 mm ²	1.5 ... 35 mm ²
0.2 ... 2.5 mm ²	0.5 ... 4 mm ²	1 ... 6 mm ²	1.5 ... 10 mm ²	1.5 ... 10 mm ²
1.5 ... 1.8 Nm	1.6 ... 1.8 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1, IEC 60947-7-2, cULus, ©	IEC 60947-7-1, IEC 60947-7-2, cULus, ©	IEC 60947-7-1, IEC 60947-7-2, cULus, ©	IEC 60947-7-1, IEC 60947-7-2, cULus, ©	IEC 60947-7-1, IEC 60947-7-2, cULus, ©
				
8WH1000-0AH00	8WH1000-0AJ00	8WH1000-0AK00	8WH1000-0AM00	–
8WH1000-0AH01	8WH1000-0AJ01	8WH1000-0AK01	8WH1000-0AM01	–
–	–	–	–	–
8WH1000-0AH02	–	–	–	–
8WH1000-0AH08	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8WH1000-0CH07	8WH1000-0CJ07	8WH1000-0CK07	–	8WH1000-0CM07
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9000-1PA00	8WH9000-1PA00	8WH9076-1PA00	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9070-6BA00	8WH9070-6BA00	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9002-8AC10	–	8WH9002-8EC10	8WH9002-8GC10	8WH9002-8GC10
–	–	8WH9002-8FC10	8WH9002-8HC10	8WH9002-8HC10
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9064-5BA06	8WH9065-5BA06	8WH9066-5BA06	8WH9067-5BA06	8WH9067-5BA06

8WH screw terminals

8WH1 through-type terminals for high-current applications



	Terminal size				
	50 mm ²	70 mm ² new	95 mm ²	150 mm ²	240 mm ²
Terminal width	20 mm	20 mm	25 mm	31 mm	36 mm
Max. load current I_{max}	150 A	192 A	232 A	309 A	415 A
Max. operational voltage U_{max}	1000 V	1000 V	1000 V	1000 V	1000 V
AWG	6 ... 0	4 ... 000	4 ... 000	2 ... 300	00 ... 500
Connection capacity, rigid	16 ... 70 mm ²	16 ... 95 mm ²	25 ... 95 mm ²	35 ... 150 mm ²	70 ... 240 mm ²
Connection capacity, flexible with end sleeve	25 ... 50 mm ²	16 ... 70 mm ²	35 ... 95 mm ²	50 ... 150 mm ²	70 ... 185 mm ²
Tightening torque	6 ... 8 Nm	8 ... 10 Nm	15 ... 20 Nm	25 ... 30 Nm	25 ... 30 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus

Terminals	Color					
① Through-type terminals						
2	● Gray	8WH1000-0AN00	8WH1000-0AP00	8WH1000-0AQ00	8WH1000-0AS00	8WH1000-0AU00
	● Blue	8WH1000-0AN01	8WH1000-0AP01	8WH1000-0AQ01	8WH1000-0AS01	8WH1000-0AU01
② PE through-type terminals						
2	● Green-yellow	8WH1000-0CN07	8WH1000-0CP07	8WH1000-0CQ07	–	–

Specific accessories

Tap-off terminal



- When wiring a tap-off with a smaller cross-section, observe the overload and short-circuit strength specified in VDE 0100 Part 430

I_{max}	Cross-section	Article No.	Article No.	Article No.	Article No.	Article No.
57 A	10 mm ²	8WH9120-0AA00	–	8WH9120-0BA00	8WH9120-0CA00	8WH9120-0CA00

Insertion profiles



- Evens out the prismatic sleeve base when using flat conductors

Article No.	Article No.	Article No.	Article No.	Article No.
8WH9020-3MA00	–	8WH9020-3NA00	8WH9020-3PA00	8WH9020-3PA00

Combs



- Fully insulated, fitted in the clamping sleeve and latched with the terminal enclosure

I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
232 A	2-pole	–	–	8WH9020-3AA00	8WH9020-3CA00	–
	3-pole	–	–	8WH9020-3BA00	8WH9020-3DA00	–
320 A	2-pole	–	–	–	–	8WH9020-3EA00
	3-pole	–	–	–	–	8WH9020-3FA00

Permanent links



- For cross links
- Screw heads with insulating collar
- Remove partition first

I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
150 A	2-pole	8WH9020-6HC00	8WH9020-3AH00 new	–	–	–
	3-pole	8WH9020-6HD00	8WH9020-3AJ00 new	–	–	–

See general accessories, from page 14/57 onwards

8WH1 two-tier terminals



	Terminal size	
	2.5 mm ²	4 mm ²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	28 A	36 A
Max. operational voltage U_{max}	500 V	800 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²	0.14 ... 6 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm ²	0.14 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	cULus, CE	cULus, CE

Version	Color		
① Two-tier terminals			
Without equipotential bonding	● Gray	8WH1020-0AF00	8WH1020-0AG00
With equipotential bonding	● Blue	8WH1020-0AF01	8WH1020-0AG01
	● Gray	8WH1025-0AF00	8WH1025-0AG00
② PE two-tier terminals			
	● Green-yellow	8WH1020-0CF07	8WH1020-0CG07

Specific accessories



Covers				
	Width	Color	Article No.	Article No.
	2.2 mm	● Gray	8WH9000-1QA00	8WH9000-1QA00
Compartment partitions				
	Width	Color	Article No.	Article No.
	2 mm	● Gray	8WH9070-6FA00	8WH9070-6FA00
Spacer plates				
	• Compensates for tier offset if other terminals are mounted side by side			
	Width	Color	Article No.	Article No.
	2.5 mm	● Gray	8WH9160-0AA00	8WH9160-0AA00

See general accessories, from page 14/57 onwards

8WH screw terminals









8WH1 isolating terminals



	Terminal size	
	4 mm ²	6 mm ²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm ²	0.2 ... 10 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²	0.2 ... 2.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm ²	0.2 ... 10 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²	0.2 ... 2.5 mm ²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	cULus, C	cULUS
		

Terminals	Color		
2	 Gray	8WH1000-6AG00	8WH1000-6AH00

Specific accessories

Plug-in zone connectors						
	Types	Color	I_{max}	Illuminated display	Article No.	Article No.
	Isolating plugs	 Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
	Through-type connectors	 Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
	Fused connectors ¹⁾	 Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA Without	8WH9040-3AB08 8WH9040-3DB08	8WH9040-3AB08 8WH9040-3DB08
	Component connectors	 Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00


¹⁾ The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

8WH1 isolating blade terminals




	Terminal size
	4 mm ²
Terminal width	6.2 mm
Max. load current I_{\max}	20 A
Max. operational voltage U_{\max}	500 V
AWG	26 ... 12
Connection capacity, one rigid conductor	0.14 ... 4 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²
Tightening torque	0.6 ... 0.8 Nm
Standard	UL, CE



Terminals	Color	
2	● Gray	8WH1000-6CG00

Specific accessories

Warning covers for 8WH1		
Image	Color	Article No.
	● Yellow Lightning symbol	8WH9063-5BA06



See general accessories, from page 14/57 onwards

8WH screw terminals

8WH1 two-tier terminals with isolating function




		Terminal size 4 mm ²	
	Terminal width	6.2 mm	6.2 mm
	Max. load current I_{\max}	38 A	38 A
	Max. operational voltage U_{\max}	500 V	500 V
	AWG	26 ... 10	26 ... 10
	Connection capacity, one rigid conductor	0.14 ... 6 mm ²	0.14 ... 6 mm ²
	Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
	Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm ²	0.14 ... 6 mm ²
	Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
	Tightening torque	0.6 ... 0.8 Nm	0.6 ... 0.8 Nm
	Standard	UL, CE	UL, CE



Version	Color		
① Isolating terminal			
Isolating terminal in the upper tier	● Gray	8WH1020-6AG00	–
② Isolating blade			
Isolating blade in the upper tier	● Gray	–	8WH1020-6AC00

Specific accessories



Covers				
	Width	Color	Article No.	Article No.
	2.2 mm	● Gray	8WH9000-1QA00	8WH9000-1QA00
Compartment partitions				
	Width	Color	Article No.	Article No.
	2 mm	● Gray	8WH9070-6FA00	8WH9070-6FA00
Spacer plates				
	• Compensates for tier offset if other terminals are mounted side by side			
	Width	Color	Article No.	Article No.
2.5 mm	● Gray	8WH9160-0AA00	8WH9160-0AA00	

See general accessories, from page 14/57 onwards

8WH1 measuring transformer isolating terminals




	Terminal size 6 mm ²	
Terminal width	8.2 mm	8.2 mm
Rated uninterrupted current I_u	41 A	41 A
Rated insulation voltage U_i	500 V	800 V
AWG	24	8
Connection capacity, rigid	0.5 ... 10 mm ²	0.5 ... 10 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 6 mm ²	0.5 ... 6 mm ²
Disconnect slide tightening torque	0.6 ... 0.8 Nm	–
Tightening torque	1.5 ... 1.6 Nm	1.5 ... 1.6 Nm
Standard	cULus, c	cULus, c






Terminals	Color		
1 Isolating terminals			
2 recesses for screwing in the test sockets	● Gray	8WH1000-7AH00	–
2 Through-type terminals with identical contour			
2 recesses for screwing in the test sockets	● Gray	–	8WH1000-7BH00


Specific accessories


Covers				
	Width	Color	Article No.	Article No.
	2.2 mm	● Gray	8WH9000-3UA00	8WH9000-3UA00

Disconnecting links				
	<ul style="list-style-type: none"> For bridging two adjacent terminals Cannot be used with the bare 8WH9010-0MB12 test socket 			
	Tightening torque	Number of poles	Color	Article No.
	0.6 ... 0.8 Nm	2-pole	● Gray	8WH9021-0AC00
				Article No.
				8WH9021-0AC00

Connecting combs, separable				
	<ul style="list-style-type: none"> Consisting of connection wire, spacer sleeves and screws For bridging terminals, the connection wire is adjustable Cannot be used with the bare 8WH9010-0MB12 test socket 			
	Tightening torque	Number of poles	Color	Article No.
	0.6 ... 0.8 Nm	10-pole	● Gray	8WH9021-0AL00
				Article No.
				8WH9021-0AL00

Short-circuiting plugs, fully insulated				
	<ul style="list-style-type: none"> For short-circuiting adjacent terminals For simple transformer measurements Required when the bare 8WH9010-0MB12 test adapter is used in the measuring transformer terminal 			
	I_{max}	Number of poles	Color	Article No.
	20 A	2-pole	● Black	8WH9010-0BC08
				Article No.
				8WH9010-0BC08


Test sockets, insulated				
	<ul style="list-style-type: none"> For screwing into the measuring transformer terminals The 8WH9021-0AC00 disconnecting link shall be used for short-circuiting adjacent terminals 			
	Tightening torque	Color	Article No.	Article No.
	0.6 ... 0.8 Nm	● Green	8WH9010-0MB03	8WH9010-0MB03
		● Violet	8WH9010-0MB11	8WH9010-0MB11
		● Yellow	8WH9010-0MB06	8WH9010-0MB06

Test sockets, bare				
	<ul style="list-style-type: none"> For screwing into the measuring transformer terminals For simple transformer measurements For tapping with test plug The 8WH9010-0BC08 short-circuiting plug shall be used for short-circuiting adjacent terminals 			
	Tightening torque	Article No.	Article No.	
	0.6 ... 0.8 Nm	8WH9010-0MB12	8WH9010-0MB12	

See general accessories, from page 14/57 onwards

8WH screw terminals

8WH1 fuse terminals



	Terminal size	
	4 mm ²	6 mm ²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	6.3 A	10 A
Max. operational voltage U_{max}	500 V	630 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm ²	0.2 ... 10 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²	0.2 ... 2.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm ²	0.2 ... 10 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²	0.2 ... 2.5 mm ²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	IEC 60947-7-3, cULus, ©	IEC 60947-7-3, cULus, ©



LED	Color		
For 5 × 20 mm G fuse links			
① Without	● Black	8WH1000-1GG08	–
② AC/DC with LED 10 ... 30 V	● Black	8WH1000-1KG38	–
② AC/DC with LED 110 ... 250 V	● Black	8WH1000-1MG88	–
For 6.3 × 32 mm G fuse links (inch fuses)			
① Without	● Black	–	8WH1000-1HH08
② AC/DC with LED 12 ... 30 V	● Black	–	8WH1000-1PH38

Specific accessories


Plug-in zone connectors						
	Version	Color	I_{max}	Illuminated display	Article No.	Article No.
	Fused connectors ¹⁾	● Schwarz	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
				Without	8WH9040-3DB08	8WH9040-3DB08
Reducing combs						
	<ul style="list-style-type: none"> For connecting terminals from terminal size 6 mm² to 2.5 mm² or 4 mm² 					
	Version	Color			Article No.	Article No.
From screw to screw	● Turquoise			–	8WH9002-8AC10	

¹⁾ The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

8WH1 two-tier terminals for soldering of components ¹⁾




Terminal size	
Terminal width	5.2 mm
Max. load current I_{max}	28 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²
Tightening torque	0.5 ... 0.6 Nm
Standard	UL, CE



Terminals	Color	Article No.
4	● Gray	8WH1020-5LF00

¹⁾ Supplied without components; the appropriate components (resistors, diodes, capacitors, ...) are to be soldered in by user

Specific accessories

Covers			
	Width	Color	Article No.
	2.2 mm	● Gray	8WH9000-1QA00
Compartment partitions			
	Width	Color	Article No.
	2 mm	● Gray	8WH9070-6FA00
Spacer plates			
	• Compensates for tier offset if other terminals are mounted side by side		Article No.
	Width	Color	8WH9160-0AA00
	2.5 mm	● Gray	


See general accessories, from page 14/57 onwards

8WH screw terminals

8WH1 diode terminals



	Terminal size
	4 mm ²
Terminal width	6.2 mm
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{\max}	800 V
Blocking voltage	1300 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 6 mm ²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm ²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm ²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm ²
Tightening torque	0.6 ... 0.8 Nm
Diode	1N 4007, integrated
Standard	UL, CE




Let-through	Color	
① From left to right	● Gray	8WH1000-6LG00
② From right to left	● Gray	8WH1000-6KG00

Specific accessories

Covers			
	Width	Color	Article No.
	2.2 mm	● Gray	8WH9000-2PA00
Warning covers new			
	Image	Color	Article No.
	Lightning symbol	● Yellow	8WH9063-5CA06

See general accessories, from page 14/57 onwards

8WH1 two-tier diode terminals

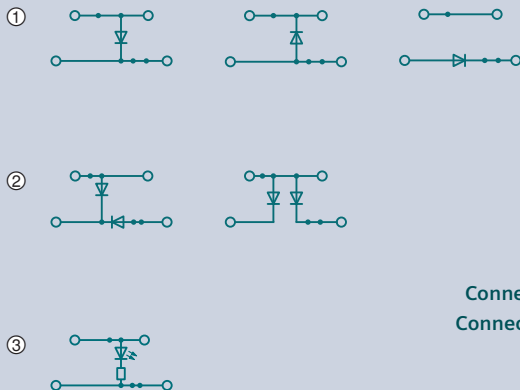

Terminal size

2.5 mm²

Terminal width 5.2 mm

Max. load current I_{max} 28 A

Uninterrupted limiting current 0.5 A

Max. operational voltage U_{max} 500 V


AWG 26 ... 10

Connection capacity, one rigid conductor 0.14 ... 4 mm²Connection capacity, two rigid conductors 0.14 ... 1.5 mm²Connection capacity, one flexible conductor with end sleeve 0.14 ... 2.5 mm²Connection capacity, two flexible conductors with end sleeve 0.14 ... 1.5 mm²

Tightening torque 0.5 ... 0.6 Nm

Diode 1N 4007, integrated


Standard cULus, CE



Types	LED	Color	
① With one diode			
Let-through from top to bottom		● Gray	8WH1020-5AF00
Let-through from bottom to top		● Gray	8WH1020-5BF00
Let-through from bottom left to bottom right		● Gray	8WH1020-5DF00
② With two diodes			
Let-through from top to bottom left and from bottom right to bottom left		● Gray	8WH1020-5FF00
Let-through from top to bottom left and from top to bottom right		● Gray	8WH1020-5HF00
③ With illuminated display			
Let-through from top to bottom	24 V DC	● Gray	8WH1020-5JF30

Specific accessories

Covers

Width
2.2 mmColor
● GrayArticle No.
8WH9000-1QA00

Compartment partitions

Width
2 mmColor
● GrayArticle No.
8WH9070-6FA00

Spacer plates







- Compensates for tier offset if other terminals are mounted side by side

Width
2.5 mmColor
● GrayArticle No.
8WH9160-0AA00

See general accessories, from page 14/57 onwards

8WH screw terminals

8WH9 shield terminals

	Terminal diameter			
	3 ... 8 mm	3 ... 14 mm	3 ... 20 mm	20 ... 35 mm
Tightening torque	0.6 Nm	0.8 Nm	0.8 Nm	1.5 ... 1.8 Nm
Sheet thickness, mounting plate	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm
				

Version

For direct shield attachment on conductive mounting plate




For connecting cable shield and enclosure ground	8WH9130-0AA00	8WH9130-0BA00	8WH9130-0CA00	8WH9130-0DA00
--	---------------	---------------	---------------	---------------

For 10 × 3 mm busbars


For connecting cable shield and enclosure ground	8WH9130-0LA00	8WH9130-0MA00	8WH9130-0NA00	8WH9130-0PA00
--	---------------	---------------	---------------	---------------

Specific accessories

N conductor support brackets

	Version	Article No.	Article No.	Article No.	Article No.
	Made of molded plastic and conductive connection with retaining screw	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00
	For mounting rail with clearance of approx. 30 mm to the busbar	8WH9140-0BA00	8WH9140-0BA00	8WH9140-0BA00	–
	For mounting rail with clearance of approx. 65 mm to the busbar	8WH9140-0CA00	8WH9140-0CA00	8WH9140-0CA00	–

N busbars, 10 × 3 mm **new**

	Version	Length	Article No.	Article No.	Article No.	Article No.
	Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

Accessories for 8WH terminal blocks

Individual labeling system

Labeling systems for

- Terminal blocks
- Modular installation devices
- Circuit breakers
- Switch disconnectors


Labeling systems available from:

Murrplastik Systemtechnik GmbH
 Dieselstraße 10
 D-71570 Oppenweiler
 Telephone: +49 7191-482-0
 email: info@murrplastik.de

The inscription labels can be inscribed with Murrplastik labeling systems or by hand.

The WIN designation facilitates assignment in the inscription software.


Blank labels



- Horizontal and vertical labeling

Version	Terminal width	Designation	Color	Article No.
Front	3.5 mm	WIN 97	● White	8WH8112-0AA05
	4.2 mm	WIN 97	● White	8WH8112-1AA05
	5.2 and 6.2 mm	WIN 88	● White	8WH8112-2AA05
	8.2, 10.2, 12.2 and 16 mm	WIN 40	● White	8WH8112-4AA05
Flat	3.5 mm	WIN 97	● White	8WH8113-0AA05
	4.2 mm	WIN 180	● White	8WH8113-1AA05
	5.2 mm	WIN 182	● White	8WH8113-1AA05
	6.2 mm	WIN 184	● White	8WH8113-1AA05
	8.2 mm	WIN 186	● White	8WH8113-1AA05
	10.2 mm	WIN 188	● White	8WH8113-1AA05
	12.2 and 16 mm	WIN 46Z	● White	8WH8113-6AA05


Snap-on device labels



- For identification of, e.g. circuit breakers, contactors and control systems

Version	Designation	Color	Article No.
20 × 7 mm, snap-on hooks at side	WIN 95	● White	8WH8210-0AA55
20 × 7 mm, snap-on hooks at side	WIN 95	● Turquoise	8WH8210-0AA56

Adhesive device labels









- For identification of, e.g. modular installation devices and switch disconnectors

Types	Designation	Color	Article No.
15 × 6 mm	WIN 098	● White	8WH8210-0AA35
	WIN 099	● Yellow	8WH8210-0AA36
19 × 8 mm	WIN 088	● White	8WH8210-0AA45
	WIN 082	● Yellow	8WH8210-0AA46

Accessories for 8WH terminal blocks

Standard labeling system

				Terminal size	1.5 mm ²	2.5 mm ²		
				Terminal width	4.2 mm/5.2 mm (8WH3)	5.2 mm/6.2 mm (8WH3)		
Front								
	Vertical	Consecutive numbering	1 ... 10 (10×)	8WH8120-1AB05	8WH8120-2AB05			
			11 ... 20 (10×)	8WH8120-1AB15	8WH8120-2AB15			
			21 ... 30 (10×)	8WH8120-1AB25	8WH8120-2AB25			
			31 ... 40 (10×)	8WH8120-1AB35	8WH8120-2AB35			
			41 ... 50 (10×)	8WH8120-1AB45	8WH8120-2AB45			
			51 ... 60 (10×)	8WH8120-1AB55	8WH8120-2AB55			
			61 ... 70 (10×)	8WH8120-1AB65	8WH8120-2AB65			
			71 ... 80 (10×)	8WH8120-1AB75	8WH8120-2AB75			
			81 ... 90 (10×)	8WH8120-1AB85	8WH8120-2AB85			
			91 ... 100 (10×)	8WH8120-1AC05	8WH8120-2AC05			
			L1, L2, L3, N, PE	–	8WH8120-2AA15			
			Custom inscription	–	8WH8120-2XA05-Z Y01			
				Horizontal	Consecutive numbering	1 ... 10 (10×)	8WH8140-1AB05	8WH8140-2AB05
						11 ... 20 (10×)	8WH8140-1AB15	8WH8140-2AB15
21 ... 30 (10×)	8WH8140-1AB25	8WH8140-2AB25						
31 ... 40 (10×)	8WH8140-1AB35	8WH8140-2AB35						
41 ... 50 (10×)	–	8WH8140-2AB45						
51 ... 60 (10×)	–	8WH8140-2AB55						
61 ... 70 (10×)	–	8WH8140-2AB65						
71 ... 80 (10×)	–	8WH8140-2AB75						
81 ... 90 (10×)	–	8WH8140-2AB85						
91 ... 100 (10×)	–	8WH8140-2AC05						
Custom inscription	–	8WH8140-2XA05-Z Y01						
	Blank	–				8WH8110-1AA05	8WH8110-2AA05	
		–				8WH8110-2AA05		
Flat								
	Vertical	Consecutive numbering	1 ... 10 (10×)	8WH8121-1AB05	8WH8121-2AB05			
			11 ... 20 (10×)	8WH8121-1AB15	8WH8121-2AB15			
			21 ... 30 (10×)	8WH8121-1AB25	8WH8121-2AB25			
			31 ... 40 (10×)	8WH8121-1AB35	8WH8121-2AB35			
			41 ... 50 (10×)	8WH8121-1AB45	8WH8121-2AB45			
			51 ... 60 (10×)	8WH8121-1AB55	8WH8121-2AB55			
			61 ... 70 (10×)	–	8WH8121-2AB65			
			71 ... 80 (10×)	–	8WH8121-2AB75			
			81 ... 90 (10×)	–	8WH8121-2AB85			
			91 ... 100 (10×)	–	8WH8121-2AC05			
			Custom inscription	–	8WH8121-2XA05-Z Y01			
				Horizontal	Consecutive numbering	1 ... 10 (10×)	8WH8141-1AB05	8WH8141-2AB05
						11 ... 20 (10×)	8WH8141-1AB15	8WH8141-2AB15
						21 ... 30 (10×)	8WH8141-1AB25	8WH8141-2AB25
31 ... 40 (10×)	8WH8141-1AB35	8WH8141-2AB35						
41 ... 50 (10×)	8WH8141-1AB45	8WH8141-2AB45						
51 ... 60 (10×)	–	8WH8141-2AB55						
61 ... 70 (10×)	–	8WH8141-2AB65						
71 ... 80 (10×)	–	8WH8141-2AB75						
81 ... 90 (10×)	–	8WH8141-2AB85						
91 ... 100 (10×)	–	8WH8141-2AC05						
Custom inscription	–	8WH8141-2XA05-Z Y01						
	Blank	–				8WH8111-1AA05	8WH8111-2AA05	
		–				8WH8111-2AA05		

4 mm ²	6 mm ²	10 and 16 mm ²	35 mm ²
6.2 mm	8.2 mm	10.2 and 12.2 mm	16 mm
Article No.	Article No.	Article No.	Article No.
8WH8120-3AB05	8WH8120-4AB05	8WH8120-5AB05	–
8WH8120-3AB15	8WH8120-4AB15	8WH8120-5AB15	–
8WH8120-3AB25	8WH8120-4AB25	8WH8120-5AB25	–
8WH8120-3AB35	8WH8120-4AB35	8WH8120-5AB35	–
8WH8120-3AB45	8WH8120-4AB45	–	–
8WH8120-3AB55	8WH8120-4AB55	–	–
8WH8120-3AB65	8WH8120-4AB65	–	–
8WH8120-3AB75	8WH8120-4AB75	–	–
8WH8120-3AB85	–	–	–
8WH8120-3AC05	–	–	–
8WH8120-3AA15	8WH8120-4AA15	8WH8120-5AA15	8WH8120-7AA15
8WH8120-3XA05-Z Y01	8WH8120-4XA05-Z Y01	8WH8120-5XA05-Z Y01	8WH8120-7XA05-Z Y01
8WH8140-3AB05	8WH8140-4AB05	8WH8140-5AB05	–
8WH8140-3AB15	8WH8140-4AB15	8WH8140-5AB15	–
8WH8140-3AB25	8WH8140-4AB25	–	–
8WH8140-3AB35	–	–	–
8WH8140-3AB45	–	–	–
8WH8140-3AB55	–	–	–
8WH8140-3AB65	–	–	–
8WH8140-3AB75	–	–	–
8WH8140-3AB85	–	–	–
8WH8140-3AC05	–	–	–
8WH8140-3XA05-Z Y01	8WH8140-4XA05-Z Y01	8WH8140-5XA05-Z Y01	8WH8140-7XA05-Z Y01
8WH8110-3AA05	8WH8110-4AA05	8WH8110-5AA05	8WH8110-7AA05
Article No.	Article No.	Article No.	Article No.
8WH8121-3AB05	8WH8121-4AB05	8WH8121-5AB05	–
8WH8121-3AB15	8WH8121-4AB15	8WH8121-5AB15	–
8WH8121-3AB25	–	8WH8121-5AB25	–
8WH8121-3AB35	–	–	–
8WH8121-3AB45	–	–	–
8WH8121-3AB55	–	–	–
8WH8121-3AB65	–	–	–
8WH8121-3AB75	–	–	–
8WH8121-3AB85	–	–	–
8WH8121-3AC05	–	–	–
8WH8121-3XA05-Z Y01	8WH8121-4XA05-Z Y01	8WH8121-5XA05-Z Y01	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
8WH8141-3XA05-Z Y01	8WH8141-4XA05-Z Y01	8WH8141-5XA05-Z Y01	–
8WH8111-3AA05	8WH8111-4AA05	8WH8111-5AA05	8WH8111-7AA05

Accessories for 8WH terminal blocks

Mounting accessories

Lateral mounting test plugs



- For individual assembly of test plug connectors
- Cannot be used for 8WH3 insulation displacement terminals.

Terminal size	Terminal width	Color	Article No.
2.5 mm ²	5.2 mm	● Red	8WH9010-0EB02

Spacer plates



- For skipping single terminals for individual test plug assembly
- Not suitable for 8WH3 insulation displacement terminals

Terminal size	Terminal width	Color	Article No.
2.5 mm ²	5.2 mm	● Red	8WH9010-2BA02

Terminal strip markers, for end retainers



- Height-adjustable
- For quick-fit end retainers
- Can be provided with two front labels, for terminal width 10.2 mm and terminal strip markers

Labeling field size	Color	Article No.
20 × 8 mm	● Gray	8WH9150-1CA00


Test adapters



- When plugged in, finger-safe against accidental direct contact according to EN 50274
- For 4 mm test plugs and terminal blocks with 4.2 mm ... 8.2 mm spacing

Color	Article No.
● Gray	8WH9010-0JB00

Quick-fit end retainers



- Can be provided with front labels, for terminal width 5.2 mm and terminal strip markers

Color	Article No.
● Gray	8WH9150-0CA00

Reducing combs



- For connecting two through-type terminals
- Cannot be used for 8WH1 through-type terminals and 8WH3 insulation displacement terminals

From terminal size	To terminal size	Color	Article No.
2.5 mm ² or 4 mm ²	1.5 mm ²	● Turquoise	8WH9020-0CC10
	6 mm ²	● Turquoise	8WH9020-0FC10
	10 mm ²	● Turquoise	8WH9020-0AC10
	16 mm ²	● Turquoise	8WH9020-0BC10
	35 mm ²	● Turquoise	8WH9020-0EC10
16 mm ²	35 mm ²	● Turquoise	8WH9020-0DC10


Connecting combs



Terminal size	Terminal width	Max. load current I_{\max}	Used for 8WH3	Number of poles	Article No.
1.5 mm ²	4.2 mm	17.5 A	Cannot be used	2-pole	8WH9020-6AC10
				3-pole	8WH9020-6AD10
				4-pole	8WH9020-6AE10
				5-pole	8WH9020-6AF10
				10-pole	8WH9020-6AL10
				20-pole	8WH9020-6AS10
2.5 mm ²	5.2 mm	24 A	Can be used for terminal size 1.5 mm ²	2-pole	8WH9020-6BC10
				3-pole	8WH9020-6BD10
				4-pole	8WH9020-6BE10
				5-pole	8WH9020-6BF10
				10-pole	8WH9020-6BL10
				20-pole	8WH9020-6BS10
				50-pole	8WH9020-6BT10
4 mm ²	6.2 mm	32 A	Can be used for terminal size 2.5 mm ²	2-pole	8WH9020-6CC10
				3-pole	8WH9020-6CD10
				4-pole	8WH9020-6CE10
				5-pole	8WH9020-6CF10
				10-pole	8WH9020-6CL10
				20-pole	8WH9020-6CS10
				50-pole	8WH9020-6CT10
6 mm ²	8.2 mm	41 A	Cannot be used	2-pole	8WH9020-6DC10
				3-pole	8WH9020-6DD10
				4-pole	8WH9020-6DE10
				5-pole	8WH9020-6DF10
				10-pole	8WH9020-6DL10
10 mm ²	10.2 mm	57 A	Cannot be used	2-pole	8WH9020-6EC10
16 mm ²	12.2 mm	76 A	Cannot be used	2-pole	8WH9020-6FC10
35 mm ²	16 mm	101 A	Cannot be used	2-pole	8WH9020-6GC10

8WA1 screw terminals

Through-type terminals








Terminal width, through-type terminal	6 mm	6.5 mm
Terminal width, PE/PEN through-type terminal	6 mm	7.2 mm
3-pole terminal block width	18 mm	19.5 mm
10-pole terminal block width	61 mm	65.5 mm
Max. load current I_{max}	24 A	32 A
Max. operational voltage U_{max} (UL, CE)	600 V	600 V
Rated insulation voltage U_i	800 V	800 V
AWG UL	22 ... 12	18 ... 10
AWG CE	18 ... 12	18 ... 10
Connection capacity, rigid	0.5 ... 4 mm ²	0.5 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 2.5 mm ²	0.5 ... 4 mm ²
Tightening torque	0.5 Nm	0.5 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, UL, CE	IEC 60947-7-1, IEC 60947-7-2, UL, CE

Terminal size



















2.5 mm²

4 mm²

Terminal width, through-type terminal	6 mm	6.5 mm
Terminal width, PE/PEN through-type terminal	6 mm	7.2 mm
3-pole terminal block width	18 mm	19.5 mm
10-pole terminal block width	61 mm	65.5 mm
Max. load current I_{max}	24 A	32 A
Max. operational voltage U_{max} (UL, CE)	600 V	600 V
Rated insulation voltage U_i	800 V	800 V
AWG UL	22 ... 12	18 ... 10
AWG CE	18 ... 12	18 ... 10
Connection capacity, rigid	0.5 ... 4 mm ²	0.5 ... 6 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 2.5 mm ²	0.5 ... 4 mm ²
Tightening torque	0.5 Nm	0.5 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, UL, CE	IEC 60947-7-1, IEC 60947-7-2, UL, CE









Terminals	Number of poles	Inscription	Color		
① Through-type terminal – single terminal					
2	1-pole	Blank	<ul style="list-style-type: none"> ● Beige ● Blue ● Red ● Orange ● Yellow ● Black ● Green 	8WA1011-1DF11	8WA1011-1DG11
				8WA1011-1BF23	8WA1011-1BG11
				8WA1011-1BF21	8WA1011-1BG21
				8WA1011-1BF22	8WA1011-1BG22
				8WA1011-1BF26	–
				8WA1011-1BF24	8WA1011-1BG24
				8WA1011-1BF25	–
② PE/PEN through-type terminal – single terminal					
1	1-pole	Blank	● Green-yellow	8WA1011-1PF01	8WA1011-1PG01
2	1-pole	Blank	● Green-yellow	8WA1011-1PF00	8WA1011-1PG00
① Through-type terminal block					
6	3-pole	Blank	● Beige	8WA1011-3DF21	8WA1011-3DG21
20	10-pole	Blank	● Beige	8WA1011-0DF21	8WA1011-0DG21
		1 ... 10	● Beige	8WA1011-0DF22	8WA1011-0DG22

6 mm ²	16 mm ²	35 mm ²	70 mm ²
8 mm	10 mm	16 mm	25 mm
8 mm	12 mm	16 mm	–
24.5 mm	30 mm	48 mm	–
–	–	–	–
41 A	76 A	125 A	192 A
600 V	600 V	600 V	600 V
800 V	800 V	800 V	800 V
14 ... 8	12 ... 4	10 ... 1	8 ... 3/0
16 ... 8	14 ... 6	12 ... 2	8 ... 1/0
0.7 ... 10 mm ²	1.5 ... 16 mm ²	4 ... 16 mm ²	10 ... 95 mm ²
1.5 ... 6 mm ²	2.5 ... 16 mm ²	4 ... 35 mm ²	16 ... 70 mm ²
0.8 Nm	1.2 Nm	2.5 ... 3 Nm	6 Nm
IEC 60947-7-1, IEC 60947-7-2,  , 	IEC 60947-7-1, IEC 60947-7-2,  , 	IEC 60947-7-1, IEC 60947-7-2,  , 	IEC 60947-7-1,  , 
  	  	  	
8WA1011-1DH11	8WA1204	8WA1205	8WA1206
8WA1011-1BH23	8WA1011-1BK11	8WA1011-1BM11	8WA1011-1BP11
–	–	–	–
–	–	–	–
–	–	–	–
8WA1011-1BH24	–	–	–
–	–	–	–
–	–	–	–
8WA1011-1PH00	8WA1011-1PK00	8WA1011-1PM00	–
8WA1011-3DH21	8WA1304	8WA1305	–
–	–	–	–
–	–	–	–

8WA1 screw terminals

Through-type terminals

Specific accessories

	Terminal size	2.5 mm ²	4 mm ²
Covers			
	Version	Article No.	Article No.
	With lightning symbol	8WA1810	8WA1811
	Version	Article No.	Article No.
	White, facility for labeling	8WA1860	8WA1862
	Version	Article No.	Article No.
	For connection bars, transparent	8WA1822-7AX01	8WA1822-7AX01
	Version	Article No.	Article No.
	For connection bars, white, inscription possible	8WA1822-7AX03	8WA1822-7AX03
Jumpers			
	Version	Article No.	Article No.
	For connection bars	8WA1822-7VF01	8WA1822-7VG00
Disconnecting links			
	Version	Article No.	Article No.
	The terminals must be fitted with end plates and must be mounted with the end plates facing each other		
	I_n	Article No.	Article No.
	Up to 32 A	8WA1865	8WA1865
End retainers, thermoplastic			
	Version	Article No.	Article No.
	Width	Article No.	Article No.
	Width	Article No.	Article No.
	10 mm	8WA1808	8WA1808
Insulation plate			
	Version	Article No.	Article No.
		8WA1825	8WA1825
Barriers			
	Version	Article No.	Article No.
	Between terminals with terminal sizes 2.5 and 6 mm ² two 8WH1820 barriers are required		
	Width	Article No.	Article No.
	2 mm	8WA1820	8WA1820
Connection bars			
	Version	Article No.	Article No.
	For two terminals	8WA1895	8WA1850
	For three terminals	8WA1896	8WA1851
	For four terminals	8WA1897	8WA1852
	For ten terminals	8WA1898	8WA1853

See general accessories, from page 14/78 onwards



6 mm ²	16 mm ²	35 mm ²	70 mm ²
Article No. 8WA1811	Article No. 8WA1812	Article No. 8WA1813	Article No. 8WA1814
8WA1862	8WA1892	8WA1893	–
8WA1822-7AX01 8WA1822-7AX03	8WA1822-7AX02 –	8WA1822-7AX02 –	– –
Article No. 8WA1822-7VH00	Article No. –	Article No. –	Article No. –
Article No. 8WA1865	Article No. –	Article No. –	Article No. –
Article No. 8WA1808	Article No. 8WA1808	Article No. 8WA1808	Article No. 8WA1808
Article No. 8WA1825	Article No. 8WA1822-7TK00	Article No. 8WA1822-7TK00	Article No. –
Article No. 8WA1821	Article No. 8WA1821	Article No. 8WA1823	Article No. 8WA1824
8WA1885 8WA1886 8WA1887 8WA1888	8WA1842 8WA1845 8WA1848 8WA1802	8WA1828 8WA1803 – 8WA1804	8WA1216 – – –

8WA1 screw terminals

PE through-type terminals, bare




	Terminal size	
	6 mm ²	95 mm ²
Terminal width	6 mm	16 mm
Terminal length	44 mm	75 mm
Terminal height	25 mm	63 mm
Tightening torque	0.8 Nm	15 ... 20 Nm
Connection capacity, rigid	0.5 ... 10 mm ²	–
Connection capacity, flexible with end sleeve	1.5 ... 6 mm ²	50 ... 95 mm ²
Standard	☉	☉

Terminals	Surface		
PE through-type terminals			
2	● Bare	8WA1010-1PH01	8WA1010-1PQ00

Specific accessories


Barriers	Article No.	Article No.
	8WA1821	–

See general accessories, from page 14/78 onwards

Two-tier terminals



	Terminal size	4 mm ²
	Terminal width	6.5 mm
	Max. load current I_{max}	32 A
	Rated insulation voltage U_i	690 V
	AWG 	18 ... 10
	AWG 	18 ... 10
	Connection capacity, rigid	0.5 ... 6 mm ²
	Connection capacity, flexible with end sleeve	0.75 ... 4 mm ²
	Standard	,



Version	Color	
① Two-tier terminals without equipotential bonding		
2-pole with two electrically isolated connections		
	Beige	8WA1011-2DG11
	Blue	8WA1011-2BG11
② Two-tier terminals with equipotential bonding		
1-pole		
	Beige	8WA1011-6DG11
	Blue	8WA1011-6BG11

Specific accessories

Covers			
	Version With lightning symbol		Article No. 8WA1811
	White, facility for labeling		8WA1862
	For connection bars, transparent		8WA1822-7AX01
Jumpers			
	Version For upper tier of 2-pole terminals		Article No. 8WA1822-7VG00
	For lower tier of 1 and 2-pole terminals		8WA1822-7VG01
Disconnecting links			
			Article No. 8WA1865
End plates			
			Article No. 8WA1817
Insulation plate			
	Version For upper and lower tier		Article No. 8WA1825
Connection bars			
	Version For upper tier of 2-pole terminals	Types For two terminals	Article No. 8WA1850
		For three terminals	8WA1851
		For four terminals	8WA1852
		For ten terminals	8WA1853
		For lower tier of 1 and 2-pole terminals	For two terminals
For ten terminals	8WA1838		
Barriers			
	Color Gray		Article No. 8WA1823

See general accessories, from page 14/78 onwards

8WA1 screw terminals

Insta or three-tier terminals



Rated insulation voltage U_i between phase conductors
Rated insulation voltage U_i between phase and protective conductors
and for neutral isolating distance

Terminal width
Max. load current I_{max}
AWG
Connection capacity, rigid
Connection capacity, flexible with end sleeve
Tightening torque
Standard

Terminal size
2.5 mm²

6 mm

24 A

400 V

250 V

22 ... 12

0.5 ... 4 mm²

0.5 ... 4 mm²

0.5 Nm



Types	Color	
① L, L	Beige	8WA1011-3JF18
② PE, L, L	Beige	8WA1011-3JF16
② PE, L, N	Beige	8WA1011-3JF17
③ PE, L, NT	Beige	8WA1011-3JF20


Specific accessories

Covers			
	Version		Article No.
	For connection bars, transparent		8WA1822-7AX01
	For connection bars, white		8WA1822-7AX03
Bare infeed terminals, for N busbars			
	Size	Conductor cross-section	Rated uninterrupted current
	6 × 6 mm and 10 × 3 mm	Up to 4 mm ²	32 A
		Up to 25 mm ²	76 A
		Up to 35 mm ²	125 A
			8WA2867
			8WA2868
			8WA2870
N busbars, 6 × 6 mm			
	Version	Length	Rated uninterrupted current
	For four-field	1109 mm	125 A
			8GF9324-2
End retainers, thermoplastic			
	Width		Article No.
	10 mm		8WA1808
Terminal strip labels for end retainers			
	Version		Article No.
	Blank (WIN 67)		8WA8212-0AA65
Insulation carriers			
	Use		Article No.
	For mounting insulated mounting rails		8WA1857
Labels, blank			
	Label size	Version	Article No.
	5 × 7 mm (WIN 68)	Suitable for plotting	8WA8348-2AY
Connection bars			
	Version	Types	Article No.
	For Insta terminals	For two terminals	8WA1822-7VF02
		For three terminals	8WA1822-7VF03
		For ten terminals	8WA1822-7VF10
Barriers			
	Version	Color	Article No.
	For Insta terminals	Gray	8WA1822-7TH00




See general accessories, from page 14/78 onwards

N conductor isolating and branch terminals

	Terminal size			
	2.5 mm ²	4 mm ²	6 mm ²	16 mm ²
Terminal width	6 mm	6.5 mm	8 mm	10 mm
Max. load current I_{max}	24 A	32 A	41 A	76 A
Rated insulation voltage U_i	500 V	500 V	500 V	500 V
AWG 	22 ... 12	18 ... 10	14 ... 8	12 ... 4
AWG 	22 ... 12	18 ... 10	14 ... 8	–
Connection capacity, rigid	2.5 ... 4 mm ²	0.5 ... 6 mm ²	0.75 ... 10 mm ²	1.5 ... 16 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 2.5 mm ²	0.75 ... 4 mm ²	0.5 ... 6 mm ²	1.5 ... 16 mm ²
Tightening torque	0.5 Nm	0.5 Nm	0.8 Nm	1.2 Nm
Standard	 , 	 , 	 , 	
				

Terminals	Color				
2	 Blue	8WA1011-1NF01	8WA1011-1NG31	8WA1011-1NH01	8WA1604


Specific accessories

Infeed terminals, for N busbars						
	Size	Rated uninterrupted current	Article No.	Article No.	Article No.	Article No.
	6 × 6 mm and 10 × 3 mm		32 A	8WA2867	8WA2867	–
		76 A	8WA2868	8WA2868	8WA2868	8WA2868
		125 A	8WA2870	8WA2870	8WA2870	8WA2870
N busbars, 6 × 6 mm, for four-field						
	Length	Rated uninterrupted current	Article No.	Article No.	Article No.	Article No.
	1109 mm	125 A	8GF9324-2	8GF9324-2	8GF9324-2	8GF9324-2
Label holder						
			Article No.	Article No.	Article No.	Article No.
			3TX4210-0J	3TX4210-0J	3TX4210-0J	3TX4210-0J

See general accessories, from page 14/78 onwards

8WA1 screw terminals

Through-type terminals with sectionalizing feature




	Terminal size
	2.5 mm ²
Terminal width	6 mm
Max. load current I_{max}	10 A
Rated insulation voltage U_i for open isolating distance	380 V AC, 450 V DC
Rated insulation voltage U_i when using barriers	750 V AC, 900 V DC
Connection capacity, rigid	0.25 ... 4 mm ²
Connection capacity, flexible without end sleeve	0.5 ... 2.5 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 1.5 mm ²
Tightening torque	0.5 Nm
Standard	9A, 6



















Terminals	Version	Color	
2	With 2 holes for Ø 2.3 mm test plug	● Gray	8WA1501

Specific accessories









Barriers		
	Color	Article No.
	● Gray	8WA1820

See general accessories, from page 14/78 onwards

Measuring transformer terminals

	Terminal size	6 mm ²		
		8 mm	8 mm	8 mm
① 	Terminal width	8 mm	8 mm	8 mm
② 	Max. load current I_{max}	41 A	41 A	41 A
③ 	Rated insulation voltage U_i	500 V	500 V	500 V
	AWG 	14 ... 8	14 ... 8	14 ... 8
	AWG 	16 ... 10	16 ... 10	16 ... 10
	Connection capacity, rigid	0.75 ... 10 mm ²	0.75 ... 10 mm ²	0.75 ... 10 mm ²
	Connection capacity, flexible with end sleeve	0.75 ... 10 mm ²	0.75 ... 10 mm ²	0.75 ... 10 mm ²
	Tightening torque	0.8 Nm	0.8 Nm	0.8 Nm
	Standard	 	 	 
				
Test sockets	Color	① Isolating terminal	② Instrument isolating terminal	③ Through-type terminals with identical contour
Without test socket	 Beige	8WA1011-1MH11	–	8WA1011-1MH10
With test socket	 Beige	–	8WA1011-1MH15	–


Specific accessories

Covers, for connection bars	
	Types
	Transparent
	White, facility for labeling
	Article No.
	8WA1822-7AX01
	8WA1822-7AX03
Test sockets	
	Diameter
	4 mm
	Article No.
	8WA1822-7PH00
Disconnecting links	
	<ul style="list-style-type: none"> Rated insulation voltage with disconnecting link open according to DIN VDE 0110: 125 V size C or 250 V size B
	Article No.
	8WA1822-7VH01
Insulation plate	
	Article No.
	8WA1825
Connecting comb	
	Number of poles
	2-pole
	10-pole, can be shortened as required
	Article No.
	8WA1822-7VH22
	8WA7163
Connection bars	
	Types
	Two terminals
	Three terminals
	Four terminals
	Ten terminals
	Unmounted for ten terminals
	Article No.
	8WA1885
	8WA1886
	8WA1887
	8WA1888
	8WA1822-7VH10
Barriers	
	Color
	 Gray
	Article No.
	8WA1822-7TH00

See general accessories, from page 14/78 onwards

8WA1 screw terminals

Fuse terminals



		Terminal size
		1.5 mm ²
Terminal width		10 mm
Max. load current I_{max} when using fuses		6.3 A
Max. load current I_{max} when using the isolating link		16 A
Rated insulation voltage U_i when using fuses		250 V
Rated insulation voltage U_i when using the isolating link		800 V
AWG		18 ... 14
AWG		18 ... 14
Connection capacity, rigid		1 ... 2.5 mm ²
Connection capacity, flexible with end sleeve		0.75 ... 1.5 mm ²
Tightening torque		0.8 Nm
Standard		



Version	Color	
For 5 × 25 mm G fuse links		
① Without LED	Beige	8WA1011-1SF12
② With LED 24 V AC/DC	Beige	8WA1011-1SF13
② With LED 230 V AC/DC	Beige	8WA1011-1SF15
For 6.3 × 32 mm G fuse links (inch fuses)		
① Without LED	Beige	8WA1011-1SF30
② With LED 24 V AC/DC	Beige	8WA1011-1SF31
② With LED 120 V AC/110 V DC	Beige	8WA1011-1SF32

Specific accessories


5 × 25 mm G fuse links				
	Types	Breaking capacity	Rated uninterrupted current	Article No.
	Quick	Large	1 A	8WA1822-7EF16
			1.6 A	8WA1822-7EF18
			2.5 A	8WA1822-7EF21
			4 A	8WA1822-7EF23
			6.3 A	8WA1822-7EF25
	Slow	Small	1 A	8WA1822-7EF76
			1.6 A	8WA1822-7EF78
			2.5 A	8WA1822-7EF81
			4 A	8WA1822-7EF83
			6.3 A	8WA1822-7EF85
Isolating links, 5 × 20 mm				
	Size			Article No.
	5 × 20 mm			8WH9021-OCB12

See general accessories, from page 14/78 onwards

Terminals for self-fitting with components




	Terminal size
	1.5 mm ²
Terminal width	10 mm
Max. load current I_{\max}	6.3 A
Rated insulation voltage U_i	500 V
Connection capacity, rigid	1 ... 2.5 mm ²
Connection capacity, flexible with end sleeve	0.75 ... 1.5 mm ²
Tightening torque	0.8 Nm



Terminals	Color	Article No.
Screw terminal at both ends for 2 conductors each	● Gray	8WA1011-1EE00

Specific accessories


Plugs for components	Version	Article No.
	With PCB and inscription label (20 × 9 mm)	8WA1822-7EE00

See general accessories, from page 14/78 onwards

Diode terminals




	Terminal size
	2.5 mm ²
Terminal width	6 mm
Max. load current I_{\max}	1 A
Rated insulation voltage U_{RRM}	250 V
Peak blocking voltage	1000 V
Connection capacity, rigid	0.5 ... 4 mm ²
Connection capacity, flexible without end sleeve	0.5 ... 2.5 mm ²
Connection capacity, flexible with end sleeve	0.5 ... 1.5 mm ²
Tightening torque	0.5 Nm



Terminals	Version	Color	Article No.
2	With 2 holes for Ø 2.3 mm test plug	● Gray	8WA1011-1EF20


Specific accessories

Barriers	Color	Article No.
	● Gray	8WA1820

See general accessories, from page 14/78 onwards

8WA1 screw terminals

Two-tier diode terminals

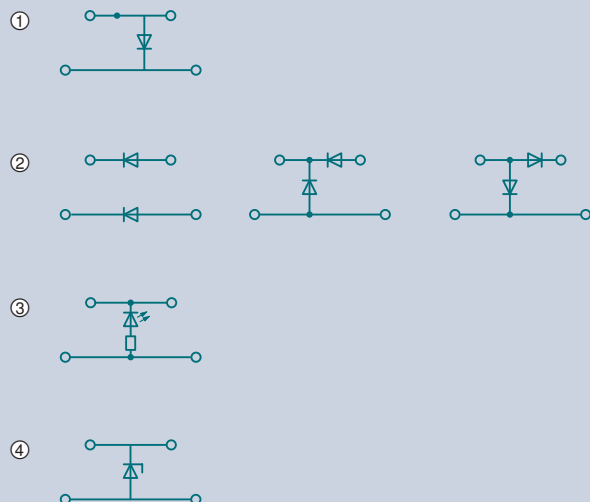

Terminal size

4 mm²

Terminal width 6.5 mm

Max. load current I_{max} 1 ARated insulation voltage U_i 250 V

Let-through current –


Avalanche voltage U_z –

AWG 18 ... 10

Connection capacity, rigid 0.5 ... 6 mm²Connection capacity, flexible without end sleeve 0.5 ... 4 mm²Connection capacity, flexible with end sleeve 0.5 ... 4 mm²

Tightening torque 0.5 Nm

Standard



Types	Bridging	Color	
① With one diode			
Let-through from top to bottom	Not possible	● Gray	–
② With two diodes			
Let-through from top right to top left and from bottom right to bottom left	Not possible	● Gray	8WA1011-6EG22
Let-through from top right to top left and from bottom to top	Not possible	● Gray	–
Let-through from top left to top right and from top to bottom	Not possible	● Gray	–
③ With red LED			
Without diode for voltage limitation		● Gray	–
④ With Zener diode			
Let-through from bottom to top		● Gray	–

Specific accessories

End plates

Color




● Gray

Article No.

8WA1817

See general accessories, from page 14/78 onwards

6.5 mm	6.5 mm	6.5 mm
32/1 A	32 A	–
250 V	24 V DC	–
–	–	0.25 A
–	–	2.4 V, ±5%
18 ... 10	18 ... 10	18 ... 10
0.5 ... 6 mm ²	0.5 ... 6 mm ²	0.5 ... 6 mm ²
0.5 ... 4 mm ²	0.5 ... 4 mm ²	0.5 ... 4 mm ²
0.5 ... 4 mm ²	0.5 ... 4 mm ²	0.5 ... 4 mm ²
0.5 Nm	0.5 Nm	0.5 Nm




8WA1011-6EG20	–	–
–	–	–
8WA1011-6EG23	–	–
8WA1011-6EG24	–	–
–	8WA1011-6EG25	–
–	–	8WA1011-6EG44

Article No.	Article No.	Article No.
8WA1817	8WA1817	8WA1817

8WA2 spring-loaded terminals

Initiator/actuator terminals

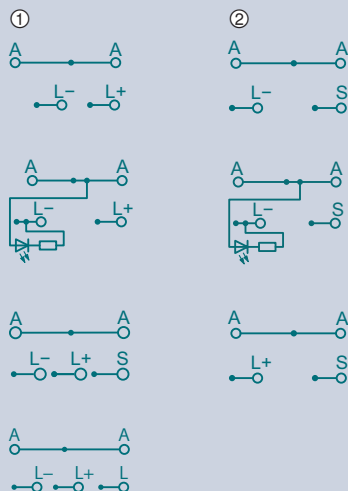

Terminal size

1.5 mm²

Terminal width 5 mm

Max. load current I_{\max} 10 A

Max. operational voltage U_{\max} 65 V

Current consumption with LED 4.8 mA

AWG 22 ... 16

AWG 28 ... 16

Connection capacity, rigid 0.08 ... 1.5 mm²

Connection capacity, flexible with end sleeve 0.2 ... 1.5 mm²

Standard



Version	Conductors ¹⁾	LED	Color	
① Initiator terminal				
PNP	L+, L-, A	–	Light gray	8WA2011-3KE10
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE12
	L+, L-, S, A	–	Light gray	8WA2011-3KE11
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE13
② Actuator terminal				
PNP	L-, S, A	–	Light gray	8WA2011-3KE31
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE33



¹⁾ L+ = brown, L- = blue, S (shield) = green, A (output) not colored





Specific accessories


Connection module					
Version	Width	Height	Color	Article No.	
For 8 initiator/actuator terminals and one infeed terminal For 16 initiator/actuator terminals, one infeed terminal and space for one terminal for further bridging for subsequent module	47 mm	65 mm	Black	8WA2011-3KE50	
	93 mm	65 mm	Black	8WA2011-3KE51	






See general accessories, from page 14/78 onwards

Infeed terminals for initiator/actuator terminals



Terminal size	1.5 mm ²
Terminal width	5 mm
Max. load current I_{max}	10 A
Max. operational voltage U_{max}	65 V
Current consumption with LED	4.8 mA
AWG 	22 ... 16
AWG 	28 ... 16
Connection capacity, rigid	0.08 ... 1.5 mm ²
Connection capacity, flexible with end sleeve	0.2 ... 1.5 mm ²
Standard	 , 



Version	Conductors ¹⁾	LED	Color	
Infeed terminal				
PNP	① L+, L-	-	 Orange	8WA2011-3KE01
	② L+, L-, S	-	 Orange	8WA2011-3KE00
		Green, 15 ... 30 V DC	 Orange	8WA2011-3KE02
NPN	② L+, L-, S	-	 Orange	8WA2011-3KE00
	① L+, L-, without ground connection	-	 Orange	8WA2011-3KE01

¹⁾ L+ = brown, L- = blue, S (shield) = green, A (output) connection not colored

Specific accessories

Connection module					
Version	Width	Height	Color	Article No.	
For 8 initiator/actuator terminals and one infeed terminal	47 mm	65 mm	 Black	8WA2011-3KE50	
For 16 initiator/actuator terminals, one infeed terminal and space for one terminal for further bridging for subsequent module	93 mm	65 mm	 Black	8WA2011-3KE51	

See general accessories, from page 14/78 onwards

Accessories for 8WA terminal blocks

Individual labeling system

Labeling systems for

- Terminal blocks
- Modular installation devices
- Circuit breakers
- Switch disconnectors


Labeling systems available from:

Murrplastik Systemtechnik GmbH
 Dieselstraße 10
 D-71570 Oppenweiler
 Telephone: +49 7191-482-0
 email: info@murrplastik.de

The inscription labels can be inscribed with Murrplastik labeling systems or by hand.

The WIN designation facilitates assignment in the inscription software.


Blank labels



- For 8WA1 and 8WA2, individually removable
- Cannot be used for two-tier terminals (lower tier), 8WA1010-1PQ00 flat terminals and 8WA1808 end retainers

Version	Designation	Color	Article No.
5 × 7 mm	WIN 68	● White	8WA8850-2AY
5 × 10 mm	WIN 68	● White	8WA8851-2AY


Snap-on device labels



- For identification of, e.g. circuit breakers, contactors and control systems

Version	Designation	Color	Article No.
20 × 7 mm, snap-on hooks at side	WIN 95	● White	8WH8210-0AA55
		● Turquoise	8WH8210-0AA56


Adhesive device labels





- For identification of, e.g. modular installation devices and switch disconnectors

Types	Designation	Color	Article No.
15 × 6 mm	WIN 098	● White	8WH8210-0AA35
	WIN 099	● Yellow	8WH8210-0AA36
19 × 8 mm	WIN 088	● White	8WH8210-0AA45
	WIN 082	● Yellow	8WH8210-0AA46

Standard labeling system

Labels, blank (WIN 68)			
	Text alignment	Label size	Article No.
	Vertical	5 × 7 mm	8WA8348-2AY
	Horizontal and vertical	5 × 10 mm	8WA8310-2AY


Labels, with inscription						
	Text alignment	Inscription	Scope of supply	Article No.		
	Horizontal	• Label size 5 × 7 mm, font height 2 mm				
		1 ... 5	3 cards each with 13× (1 ... 5) + 1× (1 ... 3)	8WA8360-0BA		
		6 ... 10	3 cards each with 13× (6 ... 10) + 1× (6 ... 8)	8WA8360-0BB		
		11 ... 15	3 cards each with 13× (11 ... 15) + 1× (11 ... 13)	8WA8360-0BC		
		16 ... 20	3 cards each with 13× (16 ... 20) + 1× (16 ... 18)	8WA8360-0BD		
		21 ... 25	3 cards each with 13× (21 ... 25) + 1× (21 ... 23)	8WA8360-0BE		
		26 ... 30	3 cards each with 13× (26 ... 30) + 1× (26 ... 28)	8WA8360-0BF		
		31 ... 35	3 cards each with 13× (31 ... 35) + 1× (31 ... 33)	8WA8360-0BG		
		36 ... 40	3 cards each with 13× (36 ... 40) + 1× (36 ... 38)	8WA8360-0BH		
		41 ... 45	3 cards each with 13× (41 ... 45) + 1× (41 ... 43)	8WA8360-0BJ		
		46 ... 50	3 cards each with 13× (46 ... 50) + 1× (46 ... 48)	8WA8360-0BK		
		56 ... 60	3 cards each with 13× (56 ... 60) + 1× (56 ... 58)	8WA8360-0BM		
		61 ... 65	3 cards each with 13× (61 ... 65) + 1× (61 ... 63)	8WA8360-0BN		
		71 ... 75	3 cards each with 13× (71 ... 75) + 1× (71 ... 73)	8WA8360-0BQ		
		76 ... 80	3 cards each with 13× (76 ... 80) + 1× (76 ... 78)	8WA8360-0BR		
		81 ... 85	3 cards each with 13× (81 ... 85) + 1× (81 ... 83)	8WA8360-0BS		
		91 ... 95	3 cards each with 13× (91 ... 95) + 1× (91 ... 93)	8WA8360-0BU		
		96 ... 100	3 cards each with 13× (96 ... 100) + 1× (96 ... 98)	8WA8360-0BV		
			Vertical	1 ... 20	3 cards each with 3× (1 ... 20) + 1× (1 ... 8)	8WA8360-0AB
				1 ... 40	3 cards each with 1× (1 ... 40) + 1× (1 ... 28)	8WA8360-0AC
41 ... 100	3 cards each with 1× (41 ... 100) + 1× (41 ... 48)			8WA8360-0AD		
1 ... 100	3 cards each with 2× (1 ... 100) + 1× (1 ... 4)			8WA8360-0AE		
101 ... 200	3 cards each with 2× (101 ... 200) + 1× (101 ... 104)			8WA8360-0AF		
201 ... 300	3 cards each with 2× (201 ... 300) + 1× (201 ... 204)			8WA8360-0AG		
A ... T	3 cards each with 3× (A ... T) + 1× (A ... H)			8WA8360-1AA		
U, V, W, X, Y, Z, +, -	3 cards each with 8× (U ... -) + 1× (U ... X)			8WA8360-1AB		
L1, L2, L3, N, PE	3 cards each with 9× (L1 ... PE) + 1× (L1 ... L3)			8WA8360-1AC		
U1, V1, W1, U2, V2, W2	3 cards each with 11× (U1 ... W2) + 1× (U1, V1)			8WA8360-1AD		
1 ... 5	3 cards each with 13× (1 ... 5) + 1× (1 ... 3)			8WA8361-0BA		
6 ... 10	3 cards each with 13× (6 ... 10) + 1× (6 ... 8)			8WA8361-0BB		
11 ... 15	3 cards each with 13× (11 ... 15) + 1× (11 ... 13)			8WA8361-0BC		
16 ... 20	3 cards each with 13× (16 ... 20) + 1× (16 ... 18)			8WA8361-0BD		
21 ... 25	3 cards each with 13× (21 ... 25) + 1× (21 ... 23)			8WA8361-0BE		
26 ... 30	3 cards each with 13× (26 ... 30) + 1× (26 ... 28)			8WA8361-0BF		
31 ... 35	3 cards each with 13× (31 ... 35) + 1× (31 ... 33)			8WA8361-0BG		
36 ... 40	3 cards each with 13× (36 ... 40) + 1× (36 ... 38)			8WA8361-0BH		
41 ... 45	3 cards each with 13× (41 ... 45) + 1× (41 ... 43)			8WA8361-0BJ		
46 ... 50	3 cards each with 13× (46 ... 50) + 1× (46 ... 48)			8WA8361-0BK		
51 ... 55	3 cards each with 13× (51 ... 55) + 1× (51 ... 53)	8WA8361-0BL				
56 ... 60	3 cards each with 13× (56 ... 60) + 1× (56 ... 58)	8WA8361-0BM				
61 ... 65	3 cards each with 13× (61 ... 65) + 1× (61 ... 63)	8WA8361-0BN				
66 ... 70	3 cards each with 13× (66 ... 70) + 1× (66 ... 68)	8WA8361-0BP				
71 ... 75	3 cards each with 13× (71 ... 75) + 1× (71 ... 73)	8WA8361-0BQ				
76 ... 80	3 cards each with 13× (76 ... 80) + 1× (76 ... 78)	8WA8361-0BR				
81 ... 85	3 cards each with 13× (81 ... 85) + 1× (81 ... 83)	8WA8361-0BS				
86 ... 90	3 cards each with 13× (86 ... 90) + 1× (86 ... 88)	8WA8361-0BT				
91 ... 95	3 cards each with 13× (91 ... 95) + 1× (91 ... 93)	8WA8361-0BU				
96 ... 100	3 cards each with 13× (96 ... 100) + 1× (96 ... 98)	8WA8361-0BV				

Accessories for 8WA terminal blocks

Standard labeling system

Labels, with inscription (continued)


- Label size 5 × 7 mm, font height 2 mm




Text alignment	Inscription	Scope of supply	Article No.
Vertical	1 ... 20	3 cards each with 3× (1 ... 20) + 1× (1 ... 8)	8WA8361-0AB
	1 ... 40	3 cards each with 1× (1 ... 40) + 1× (1 ... 28)	8WA8361-0AC
	41 ... 100	3 cards each with 1× (41 ... 100) + 1× (41 ... 48)	8WA8361-0AD
	1 ... 100	3 cards each with 2× (1 ... 100) + 1× (1 ... 4)	8WA8361-0AE
	101 ... 200	3 cards each with 2× (101 ... 200) + 1× (101 ... 104)	8WA8361-0AF
	201 ... 300	3 cards each with 2× (201 ... 300) + 1× (201 ... 204)	8WA8361-0AG
	A ... T	3 cards each with 3× (A ... T) + 1× (A ... H)	8WA8361-1AA
	U, V, W, X, Y, Z, +, -	3 cards each with 8× (U ... -) + 1× (U ... X)	8WA8361-1AB
	L1, L2, L3, N, PE	3 cards each with 9× (L1 ... PE) + 1× (L1 ... L3)	8WA8361-1AC
	U1, V1, W1, U2, V2, W2	3 cards each with 11× (U1 ... W2) + 1× (U1, V1)	8WA8361-1AD

Labels, type 347/348, with inscription

- Label size 5 × 7 mm, font height 2 mm



Text alignment	Inscription	Article No.
Horizontal	L1	8WA8347-2AC
	L2	8WA8347-2AD
	L3	8WA8347-2AE
	N	8WA8347-1AR
	PE	8WA8347-2AH
	L+	8WA8347-2AF
	L-	8WA8347-2AG



Vertical	L1	8WA8348-2AC
	L2	8WA8348-2AD
	L3	8WA8348-2AE
	N	8WA8348-1AR
	MP	8WA8348-2AB
	PE	8WA8348-2AH
	L+	8WA8348-2AF
	L-	8WA8348-2AG
	X	8WA8348-1AG
	Y	8WA8348-1AH

Labels, custom inscriptions

- Label size 5 × 7 mm, font height 2 mm
- Specify required inscription in plain text
- Can only be ordered with the order code -Z Y01

Text alignment	Article No.
Horizontal	8WA8347-0XA-Z Y01
Vertical	8WA8348-0XA-Z Y01


End labeling plates



- Paper label, inscription possible, with transparent cover
- Suitable for 8WA1805, 8WA1808 and 8WA2808 end retainers

Text alignment	Label size	Article No.
Horizontal and vertical	21 × 42 mm	8WA1806

Terminal strip labels



- Paper label, inscription possible, with transparent cover
- Suitable for 8WA1808 end retainers

Text alignment	Types	Article No.
Horizontal	With inscription	8WA8826-0AA
		8WA8826-0AB
		8WA8826-0AC
	Blank (WIN 67)	8WA8212-0AA65

Mounting accessories


End retainers, with screw fixing



- Suitable for 8WA1806 end labeling plate or 8WA8826-0A. terminal strip identification label or 3TX4 210-0H device label or four 8WA88 labels

Mounting width	Article No.
10 mm	8WA1808

End retainers, steel



- Suitable for 8WA1806 end label
- An 8WA1820 barrier must be inserted if using end retainers against an 8WA189 connection bar (size 2.5)


Mounting width	Article No.
10.3 mm	8WA1805

DIN rails




Version	Material	Standard	Length	Thickness	Article No.
Perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7.5	2 m	1 mm	5ST1145
Non-perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7.5	2 m	1 mm	5ST1141
	Copper	EN 60715-35 × 15	2 m	2.3 mm	8WA7551
	Steel, zinc-plated, chromated	Similar to EN 50022-35 × 15	2 m	1.5 mm	5ST1142

Spacer brackets




Version	Article No.
For raised mounting of terminal strips	8WA753

Spacers




Version	Drill hole	Article No.
For raised mounting of terminal strips	5.5 mm	8WA752

Mounting brackets



Version	Article No.
For mounting rails	8WA746

Insulation carriers



Version	Article No.
For insulated mounting of mounting rails onto plates, frame profiles and DIN rails EN 50022-35	8WA1857



Appendix



Conditions of sale and delivery _____ A/2

Link directory _____ A/4

Conditions of sale and delivery

1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C“). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany“¹⁾ and/or
- for consulting services the „Allgemeine Geschäftsbedingungen für Beratungsleistungen der Division DF – Deutschland“ (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services (‘BL’)¹⁾ and/or
- for other supplies the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾.

In case such supplies should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the „Standard Terms and Conditions for Consulting Services of the Division DF for Customers with a Seat or Registered Office Outside of Germany“¹⁾ and/or
- for other services the „International Terms & Conditions for Services“¹⁾ supplemented by „Software Licensing Conditions“¹⁾ and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products“¹⁾ supplemented by „Software Licensing Conditions“¹⁾

1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

¹⁾ The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN“ unequal „N“) and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations. Products labeled with „AL“ unequal „N“ are subject to European/national export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL“ and „ECCN“ indicated on order confirmations, delivery notes and invoices are authoritative.

Products without label, with label „AL:N“/„ECCN:N“, or label „AL:9X9999“/„ECCN: 9X9999“ may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-)export control regulations. In any event of such transfer of goods, works and services you shall comply with the (re-) export control regulations of the Federal Republic of Germany, of the European Union and of the United States of America.

Prior to any transfer of goods, works and services provided by us to a third party you shall in particular check and guarantee by appropriate measures that

- there will be no infringement of an embargo imposed by the European Union, by the United States of America and/or by the United Nations by such transfer, by brokering of contracts concerning those goods, works and services or by provision of other economic resources in connection with those goods, works and services, also considering the limitations of domestic business and prohibitions of by-passing those embargos;
- such goods, works and services are not intended for use in connection with armaments, nuclear technology or weapons, if and to the extent such use is subject to prohibition or authorization, unless required authorization is provided;
- the regulations of all applicable Sanctioned Party Lists of the European Union and the United States of America concerning the trading with entities, persons and organizations listed therein are considered.

If required to enable authorities or us to conduct export control checks, you, upon request by us, shall promptly provide us with all information pertaining to the particular end customer, the particular destination and the particular intended use of goods, works and services provided by us, as well as any export control restrictions existing.

You acknowledge that under the EU embargo regulations against Iran, Syria and Russia respectively the sale of certain listed goods and related services is subject to authorization by the competent export control authorities of the European Union. If (1) the goods or services ordered by you are destined for Iran, Syria or Russia, and (2) the contract for our supplies and/or services is subject to prior authorization of the competent export control authorities of the European Union, the contract between you and us shall come into force in this respect only upon granting of such authorization.

The products listed in this catalog may be subject to European/ German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities. Errors excepted and subject to change without prior notice.

Link directory

Catalog LV 10


General information

Information on low-voltage power distribution and electrical installation technology	www.siemens.com/lowvoltage
Tender specifications	www.siemens.com/lowvoltage/tenderspecifications
Conversion tool	www.siemens.com/conversion-tool
Image database	www.siemens.com/lowvoltage/picturedb
CAX download manager	www.siemens.com/cax
Newsletter system	www.siemens.com/lowvoltage/newsletter
Siemens YouTube channel	www.youtube.com/Siemens
Catalog LV 10	www.siemens.com/lv10
Catalog LV 13	www.siemens.com/lv13
Catalog LV 18	www.siemens.com/lv18
Brochures/catalogs	www.siemens.com/lowvoltage/catalogs
Operating instructions/manuals	www.siemens.com/lowvoltage/manuals
Siemens Industry Online Support (SIOS)	www.siemens.com/lowvoltage/product-support
Siemens Industry Online Support app	www.siemens.com/support-app
My Documentation Manager (MDM)	www.siemens.com/lowvoltage/mdm
Configurators	www.siemens.com/lowvoltage/configurators
Siemens Industry Mall – product catalog and online ordering system	www.siemens.com/lowvoltage/mall
Direct forwarding to the Industry Mall	www.siemens.com/product?Article No.
Training	www.siemens.com/sitrain-lowvoltage
Local contacts	www.siemens.com/lowvoltage/contact www.siemens.com/lowvoltage/components/contact www.siemens.com/lowvoltage/systems/contact www.siemens.com/lowvoltage/software/contact
Technical Support	www.siemens.com/support-request
Information on services	www.siemens.com/service-catalog
Manual for the generation, transmission and distribution of electrical energy	www.siemens.com/power-engineering-guide
Control panels for the North American market	www.siemens.com/northamerican-standards
Control panel building	www.siemens.com/controlpanel
Energy savings and amortization	www.automation.siemens.com/sinasave
SIMATIC Energy Suite	www.siemens.com/energysuite
SITOP power supplies	www.siemens.com/sitop
Power distribution with Totally Integrated Power	www.siemens.com/tip

Catalogs and further information



LV 10
Low-Voltage Power Distribution and Electrical Installation Technology
SENTRON • SIVACON • ALPHA
PDF (E86060-K8280-A101-B6-7600)




ET D1
Switches and Socket Outlets
DELTA
PDF



LV 13
3WA Air Circuit Breakers
SENTRON
PDF (E86060-K8280-B101-A1-7600)



Industry Mall
Information and Ordering Platform on the Internet:
www.siemens.com/industrymall



LV 18
Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification
SENTRON
PDF (E86060-K8280-E347-A9-7600)



SITRAIN
Digital Industry Academy
www.siemens.com/sitrain



IC 10
Industrial Controls
SIRIUS
PDF (E86060-K1010-A101-B5-7600)



Siemens TIA Selection Tool
for the selection, configuration and ordering of TIA products and devices
www.siemens.com/tst

The catalogs listed above and additional catalogs are available in PDF format at Siemens Industry Online Support www.siemens.com/lowvoltage/catalogs

Further information on low-voltage power distribution and electrical installation technology is available on the Internet at www.siemens.com/lowvoltage

Get more information

www.siemens.com/lowvoltage

Published by
Siemens AG

Smart Infrastructure
Electrical Products
Siemensstraße 10
93055 Regensburg, Germany

For the U.S. published by
Siemens Industry Inc.

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (Catalog Extract
E86060-K8280-A101-B6-7600)
KG 1222 88 En
Produced in Germany
© Siemens 2022

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit <https://www.siemens.com/industrialsecurity>.

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under <https://www.siemens.com/cert>.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.